



Electric water heater

Living in  
comfort



*Warm · Intelligent · Efficient*



# ZHONGSHAN WIE ELECTRIC APPLIANCE CO.,LTD




## COMPANY PROFILE

Zhongshan Wie Electric Appliance Co.,Ltd is located in the national home appliance industry base known as zhong shan city, guangdong province, We are a professional manufacturer with 25 years of experience in electric water heater products. We have established business relations with corporations from Europe, America,Africa, South-Asia.

Our products obtained CE, RoHS ISO9001,CIG,CB,KC,SEDEX,etc .The company has introduced a full set of imported automatic production equipment, including automatic advanced electric water heater stainless steel production line, automatic assembly line, automatic pipe cutting machine, automatic double girth welding inner tanks line and automatic high pressure foaming production line, and other advanced production equipment.

The 7S production management system is adopted to comprehensively improve the quality and output of products. With advanced production equipment, flow research and development technology and exquisite manufacturing technology, the company has achieved strong production strength.

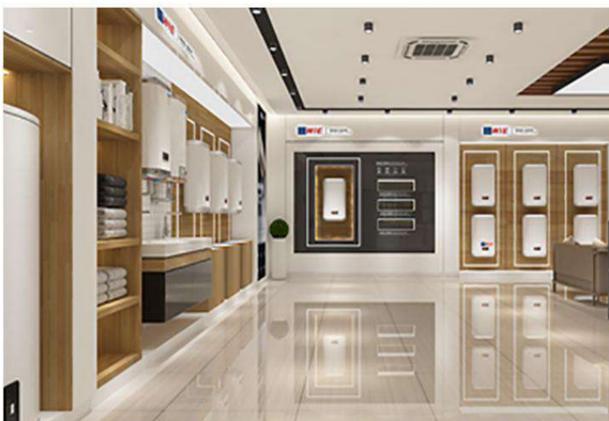

**25** years

PRODUCTION EXPERIENCE

**60000** pcs

MONTHLY CAPACITY

**500** workers

ELITE PRACTITIONERS

**30000** m<sup>2</sup>

FACTORY AREA

# EQUIPMENT DISPLAY



Foaming machine



Fiber laser cutting machine



Mechanical arm



Laser double welding machine



Pipe making machine



Auto cutting pipe machine

# PRODUCTION PROCESS



1. Punching process



2. Welding process



3. Leakage testing



6. Function test



5. Assembling



4. Foaming


# ROUND SERIES



**WS-A1**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa

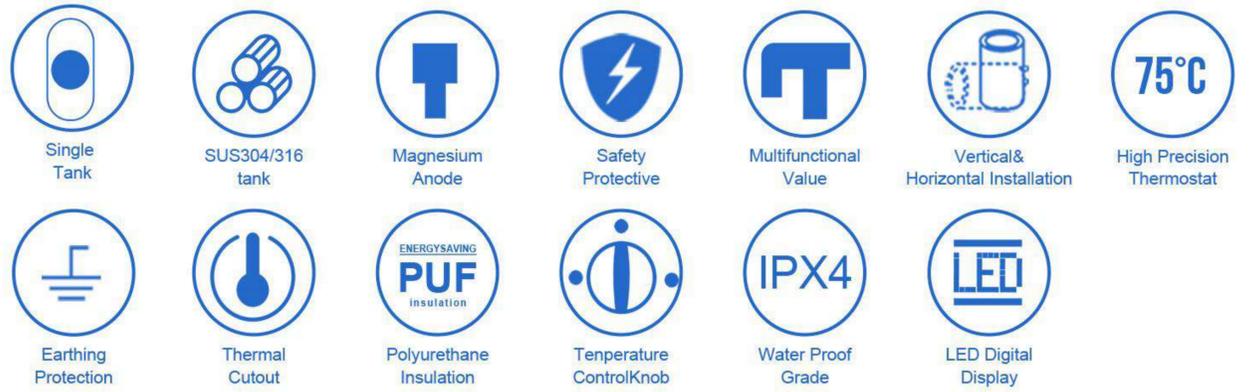

Capacity ( L )	30L	50L	80L	100L	120L	150L
Product size ( mm )	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size ( mm )	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty (20GP/40HQ)	275/690	203/510	141/350	120/300	104/260	88/220



Capacity ( L )	30L	50L	80L	100L	120L	150L
Product size ( mm )	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size ( mm )	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty (20GP/40HQ)	275/690	203/510	141/350	120/300	104/260	88/220



**WS-A2**

# ROUND SERIES



**WS-B15**

- Single Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- Vertical& Horizontal Installation
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Temperature Control Knob
- IPX4 Water Proof Grade
- LED Digital Display

Capacity ( L )	30L	50L	80L	100L	120L	150L
Product size ( mm )	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size ( mm )	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty ( 20GP/40HQ )	275/690	203/510	141/350	120/300	104/260	88/220

- Single Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- Vertical& Horizontal Installation
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Temperature Control Knob
- IPX4 Water Proof Grade
- LED Digital Display

Capacity ( L )	30L	40L	50L
Product size ( mm )	775*270*270	985*270*270	1250*270*270
Packing size ( mm )	825*310*315	1035*310*315	1265*310*315
N.W.(kg)	7.5	9.5	11.5
G.W.(kg)	9.5	11.5	13.5
Loading qty ( 20GP/40HQ )	350/830	260/660	210/550



**WS-X11**


# FLAT SERIES (MECHANICAL)



**WS-B16**



Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

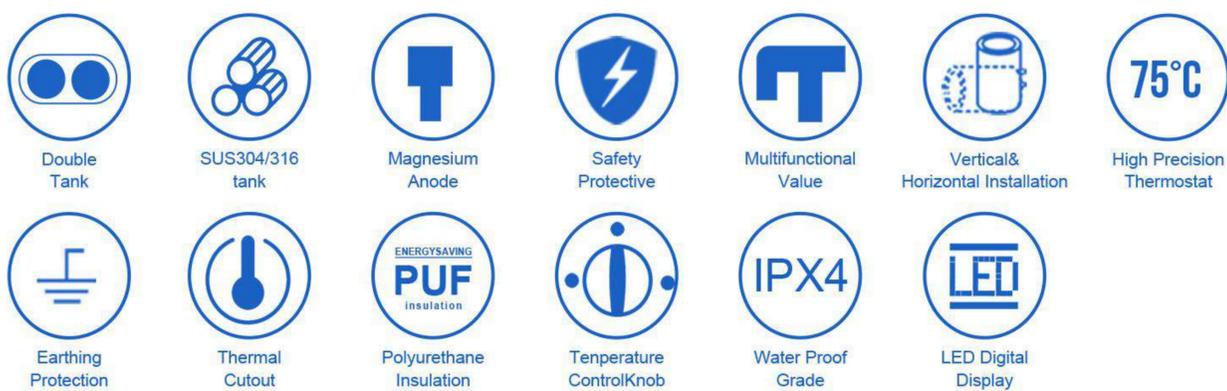


Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



**WS-B17J**

# FLAT SERIES (MECHANICAL)

WS-B33

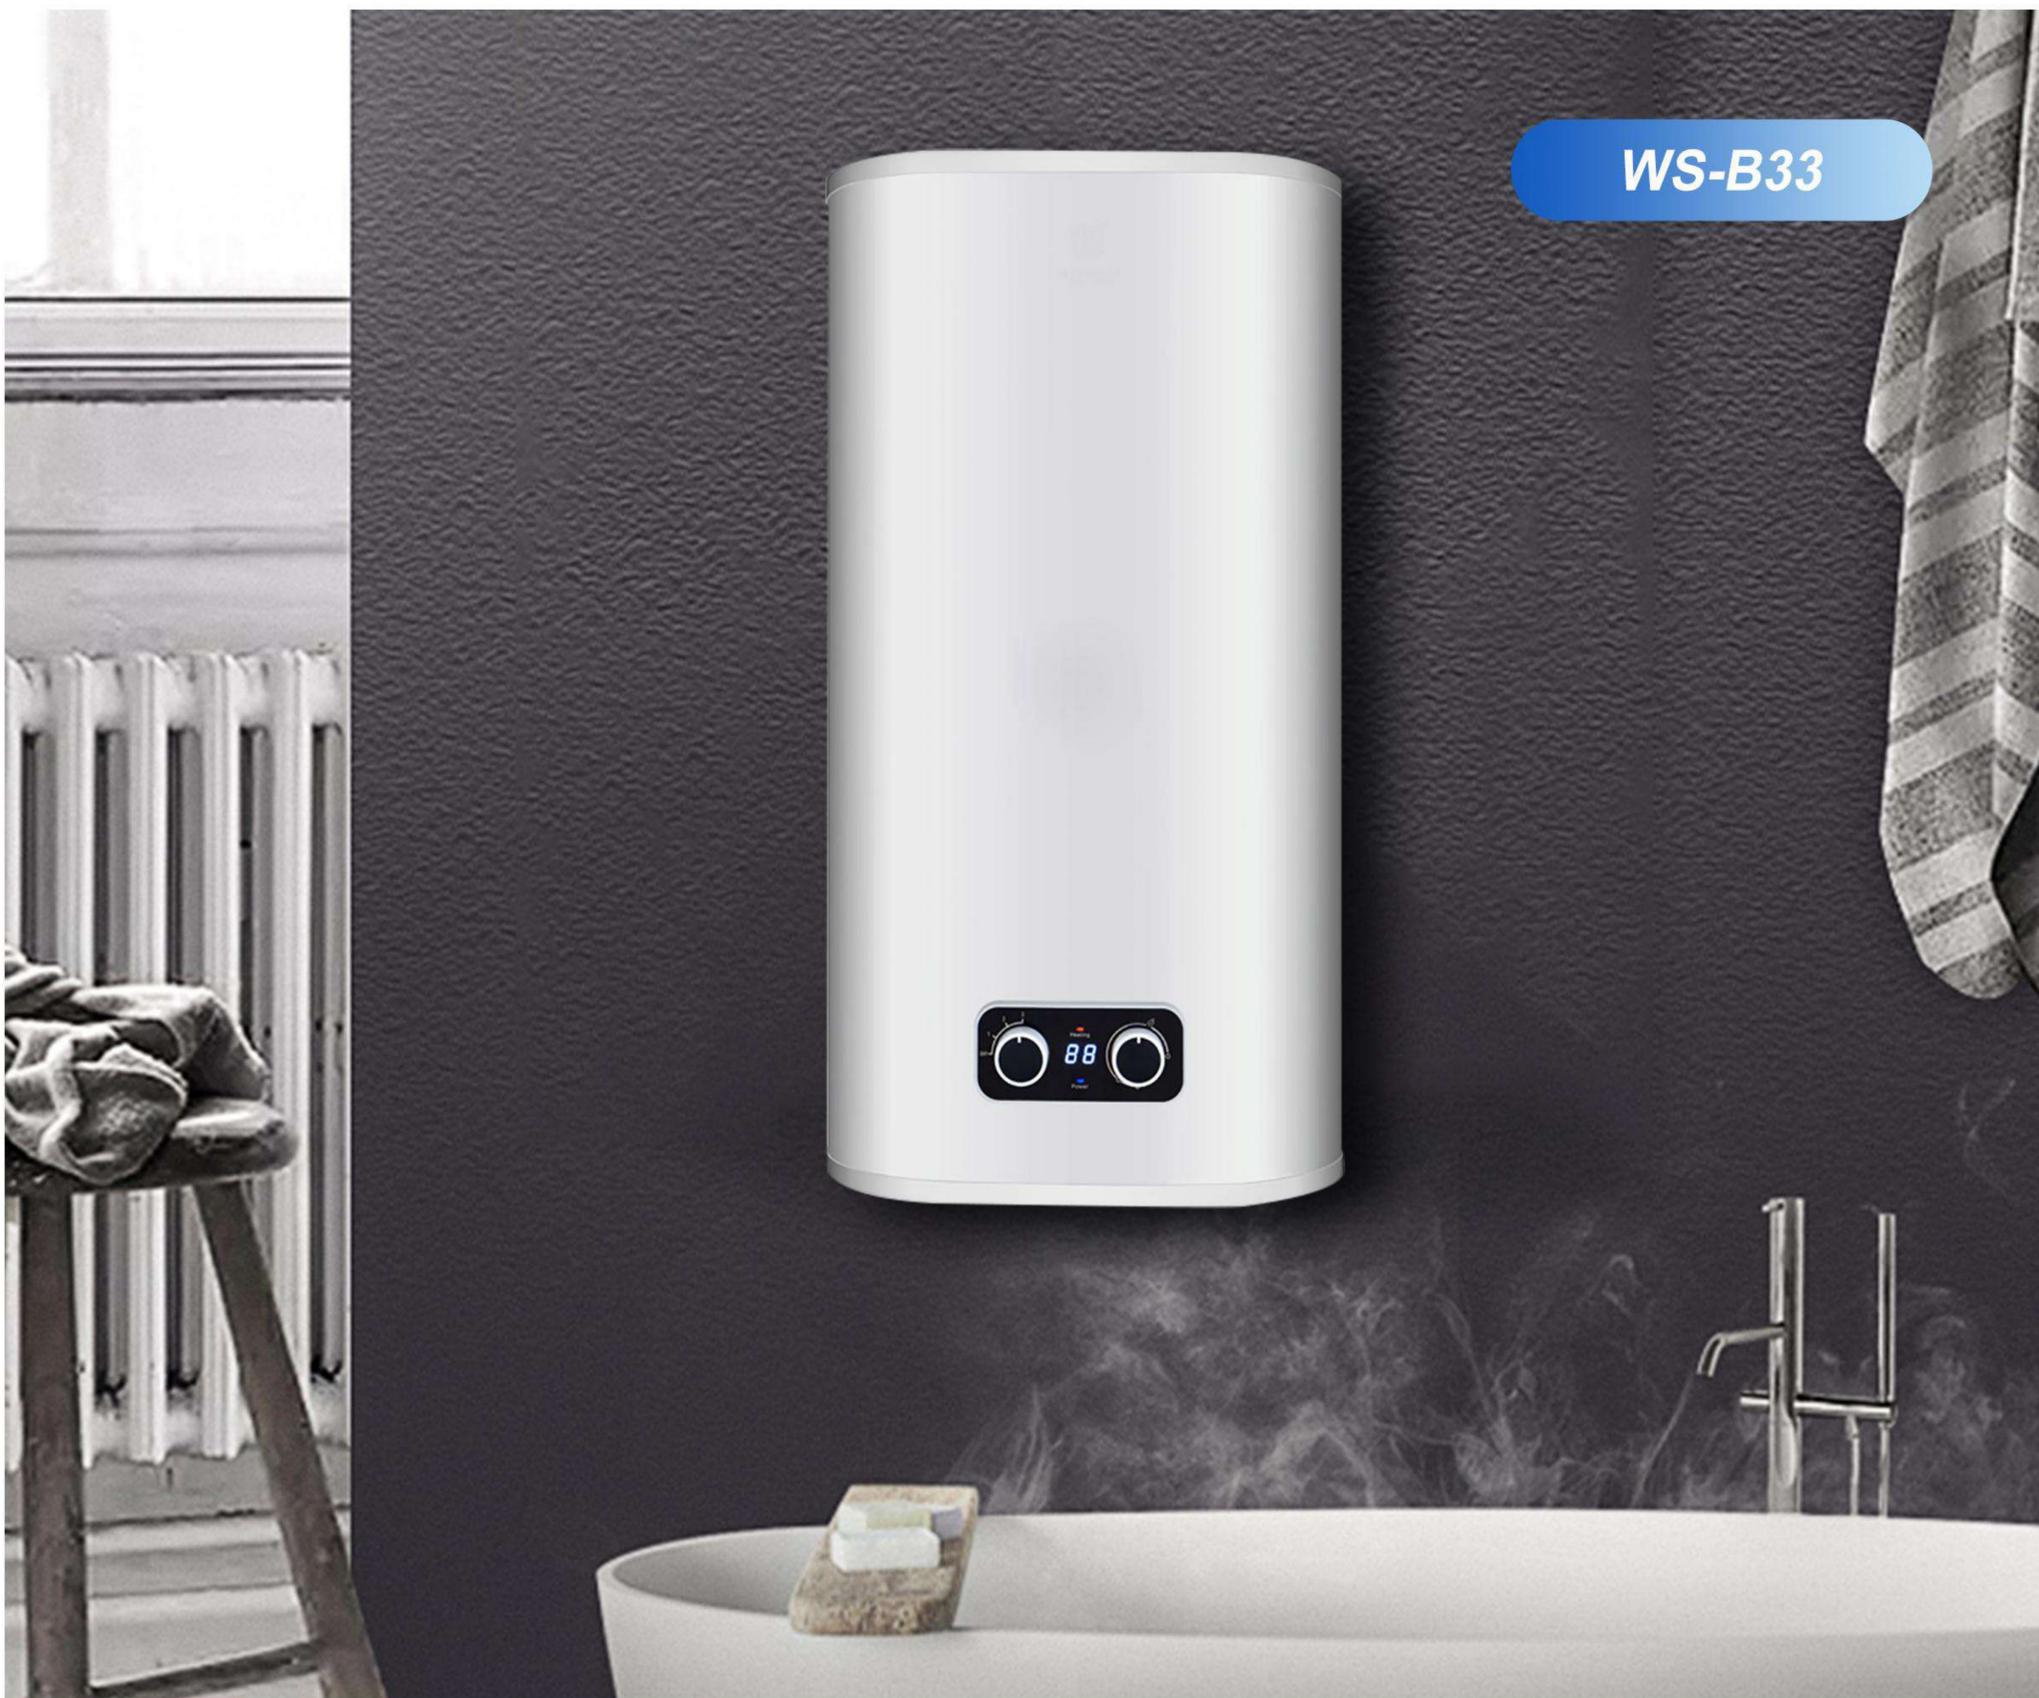

-   
Safety Protective
-   
Multifunctional Value
-   
Vertical & Horizontal Installation
-   
75°C High Precision Thermostat
-   
Earthing Protection
-   
Thermal Cutout
-   
Polyurethane Insulation
-   
Temperature Control Knob
-   
IPX4 Water Proof Grade
-   
SUS304/316 tank
-   
Double Tank
-   
Magnesium Anode
-   
LED Digital Display

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

# FLAT SERIES (MECHANICAL)



**WS-B27**

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Vertical & Horizontal Installation
- Earthing Protection
- Thermal Cutout
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- High Precision Thermostat

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290


- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Vertical & Horizontal Installation
- High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- LED Digital Display

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



**WS-B31**

# FLAT SERIES (MECHANICAL)

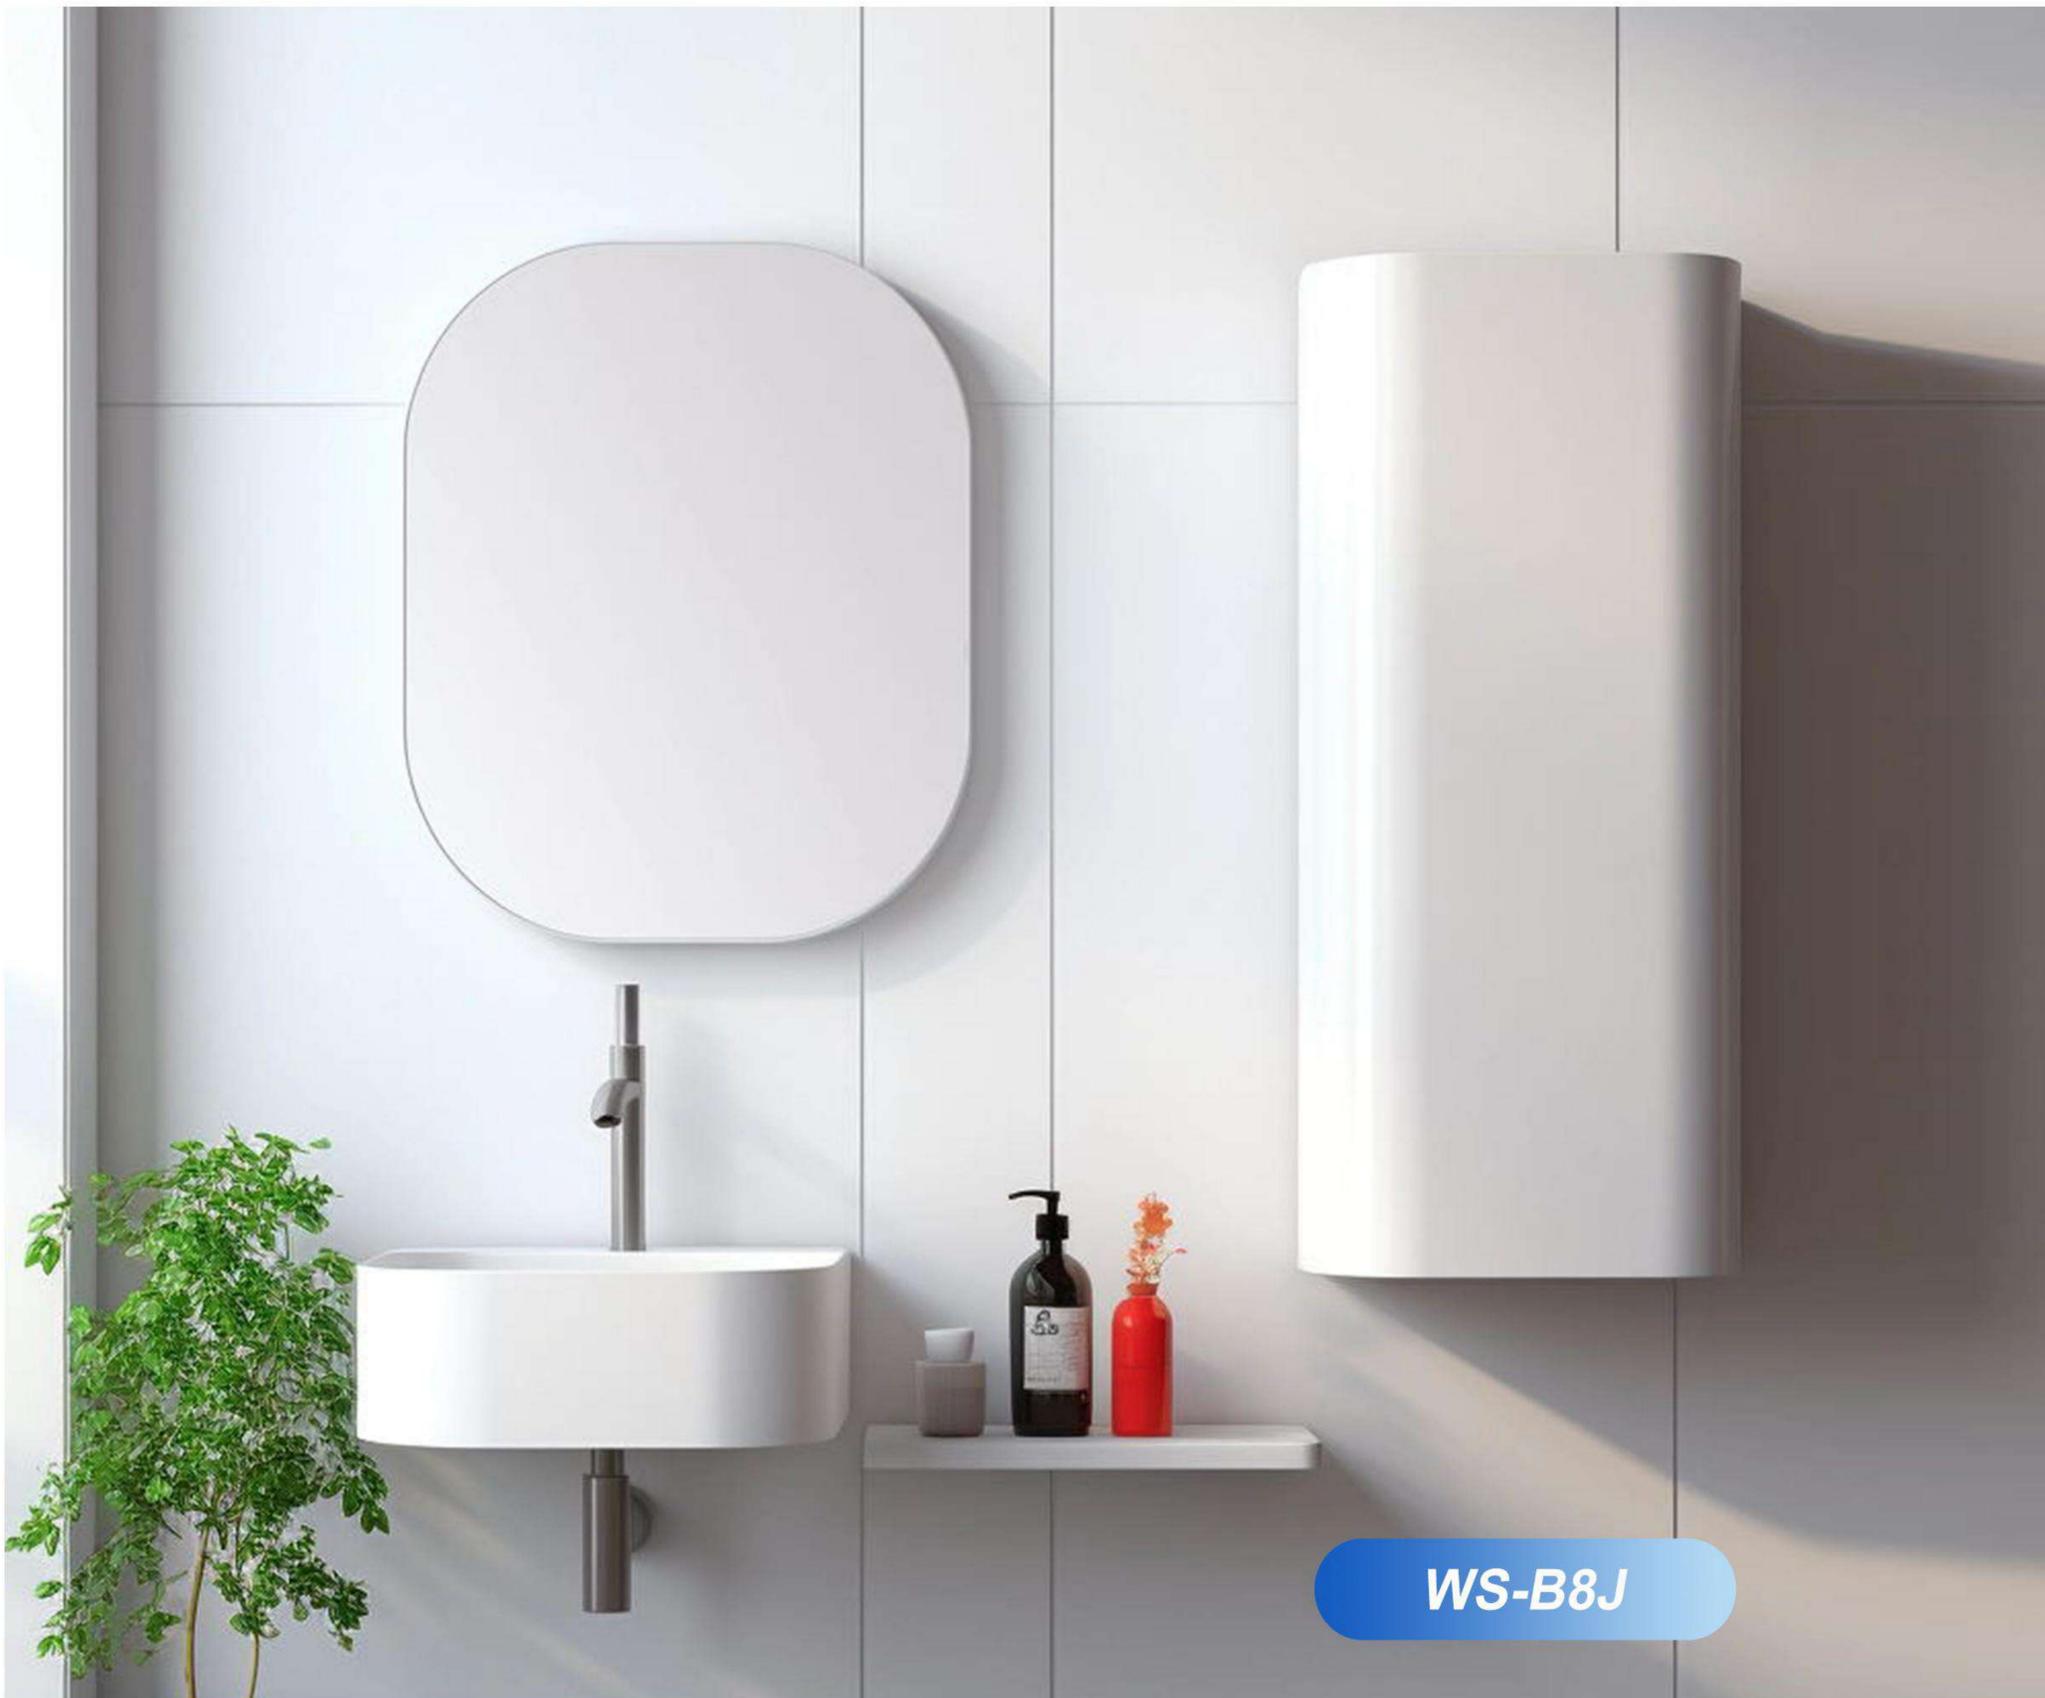

WS-B8J



Safety  
Protective



Multifunctional  
Value



Vertical &  
Horizontal Installation



High Precision  
Thermostat



Earthing  
Protection



Thermal  
Cutout



Temperature  
Control Knob



Water Proof  
Grade



SUS304/316  
tank



Double  
Tank



Magnesium  
Anode



Polyurethane  
Insulation

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

# FLAT SERIES (MECHANICAL)



**WS-B38-H**



**WS-B38-V**

- Thermal Cutout
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Vertical & Horizontal Installation
- SUS304/316 tank
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- LED Digital Display
- Double Tank
- Earthing Protection
- High Precision Thermostat

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Earthing Protection
- Thermal Cutout
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- High Precision Thermostat
- LED Digital Display
- Vertical & Horizontal Installation

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290



**WS-B35**

# FLAT SERIES (MECHANICAL)



**WS-T15**



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Water Proof Grade



High Precision Thermostat



Earthing Protection



Thermal Cutout



Polyurethane Insulation



LED Digital Display

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

# FLAT SERIES (MECHANICAL)



**WS-B12J**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



**WS-B7J**

# FLAT SERIES (MECHANICAL)



**WS-B37**

-   
Double Tank
-   
SUS304/316 tank
-   
Magnesium Anode
-   
Safety Protective
-   
Multifunctional Valve
-   
Vertical & Horizontal Installation
-   
75°C High Precision Thermostat
-   
Earthing Protection
-   
Thermal Cutout
-   
ENERGYSAVING PUF Insulation
-   
Temperature Control Knob
-   
IPX4 Water Proof Grade
-   
LED Digital Display

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

# FLAT SERIES (MECHANICAL)



**WS-B39**

- Double Tank
- Thermal Cutout
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- Vertical & Horizontal Installation
- 75°C High Precision Thermostat
- SUS304/316 tank
- ENERGYSAVING PUF Insulation
- Temperature Control Knob
- IPX4 Water Proof Grade
- Earthing Protection

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Temperature Control Knob
- IPX4 Water Proof Grade
- Vertical & Horizontal Installation

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



**WS-B32J**

# FLAT SERIES (COMPUTER)




Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

**WS-B38D**



Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

**WS-B25**

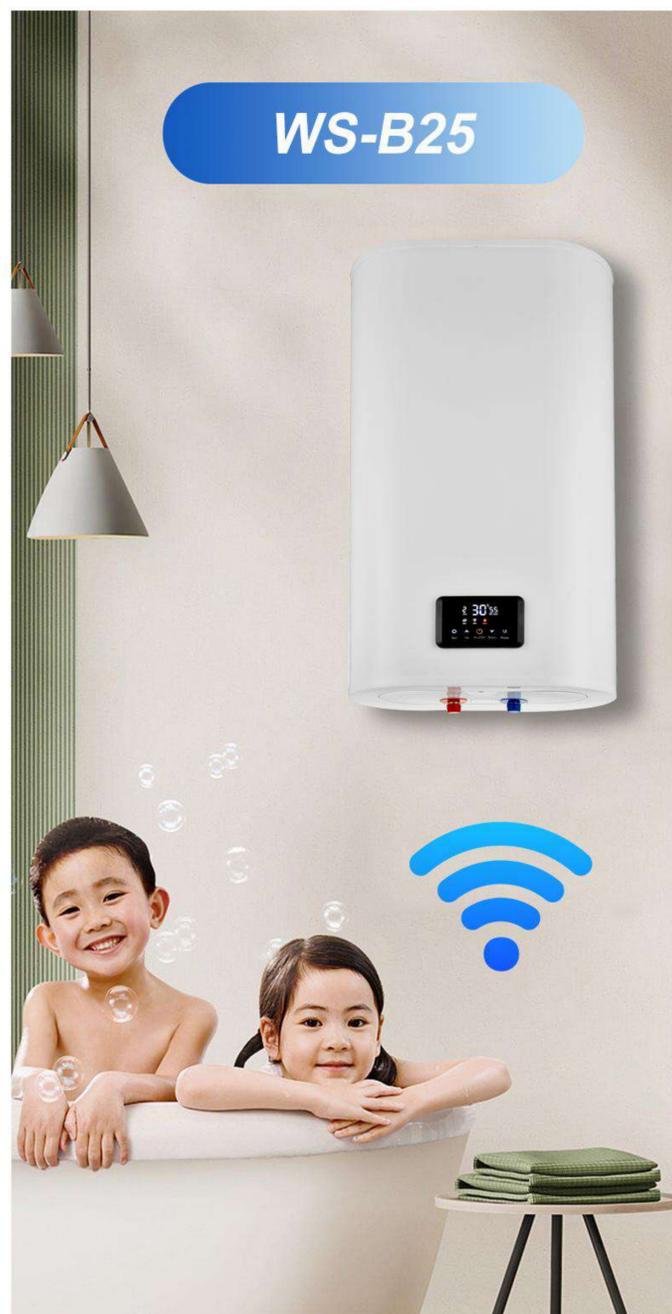

# FLAT SERIES (COMPUTER)



**WS-B40D**

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- LED Digital Display
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Touch Screen
- IPX4 Water Proof Grade
- Remote Control
- WIFI Control

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- LED Digital Display
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Touch Screen
- IPX4 Water Proof Grade
- Remote Control
- WIFI Control

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290



**WS-D17D**

# FLAT SERIES (COMPUTER)



**WS-B43D**

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Touch Screen
- Water Proof Grade IPX4
- Remote Control

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- LED Digital Display
- 75°C High Precision Thermostat
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Touch Screen
- Water Proof Grade IPX4
- Remote Control
- WIFI Control

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290



**WS-B44D**


# FLAT SERIES (COMPUTER)



**WS-42D**



Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

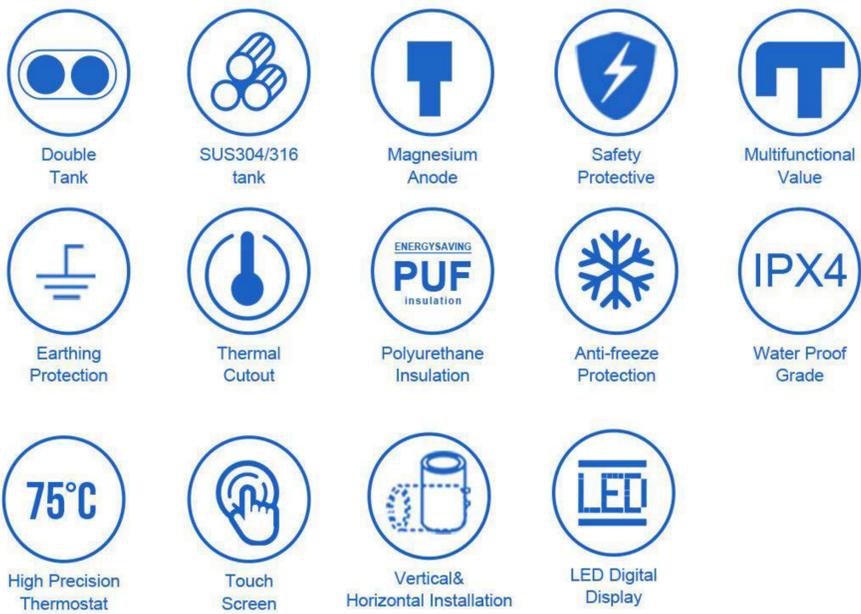

**WS-B23**



**WS-B23J**

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

# FLAT SERIES (COMPUTER)

WS-B6D



## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ)	280/730	190/495	136/350	113/290

# HORIZONTAL SERIES



- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF insulation
- Polyurethane Insulation
- Temperature Control Knob
- IPX4
- Multifunctional Value
- LED Digital Display
- 75°C
- Water Proof Grade
- High Precision Thermostat

## WS-B36JH

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF insulation
- Polyurethane Insulation
- Temperature Control Knob
- Multifunctional Value
- LED Digital Display
- 75°C
- High Precision Thermostat
- Water Proof Grade



## WS-T11H

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

# HORIZONTAL SERIES




**WS-B17H**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa




Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ)	280/730	190/495	136/350	113/290

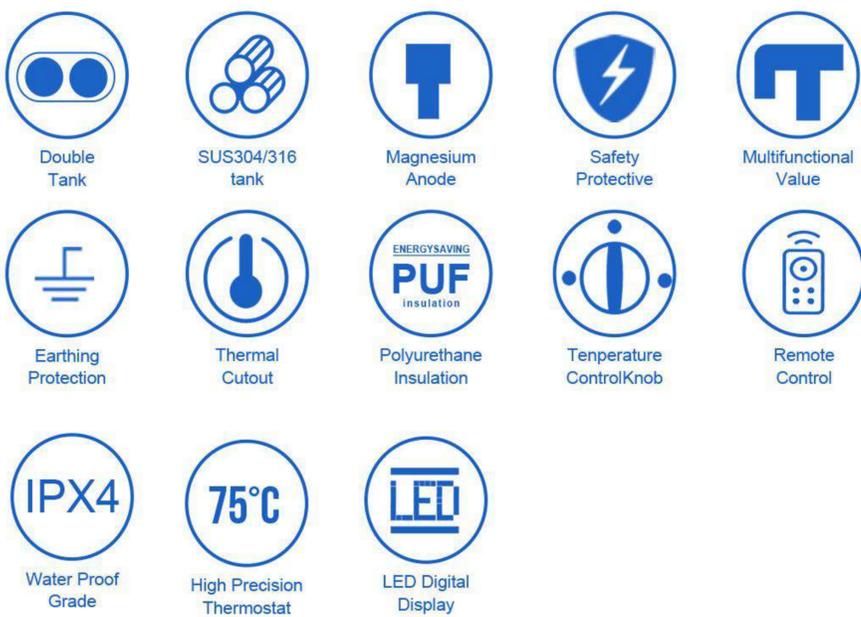

**WS-B34DH**

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ)	280/730	190/495	136/350	113/290

# SQUARE SERIES

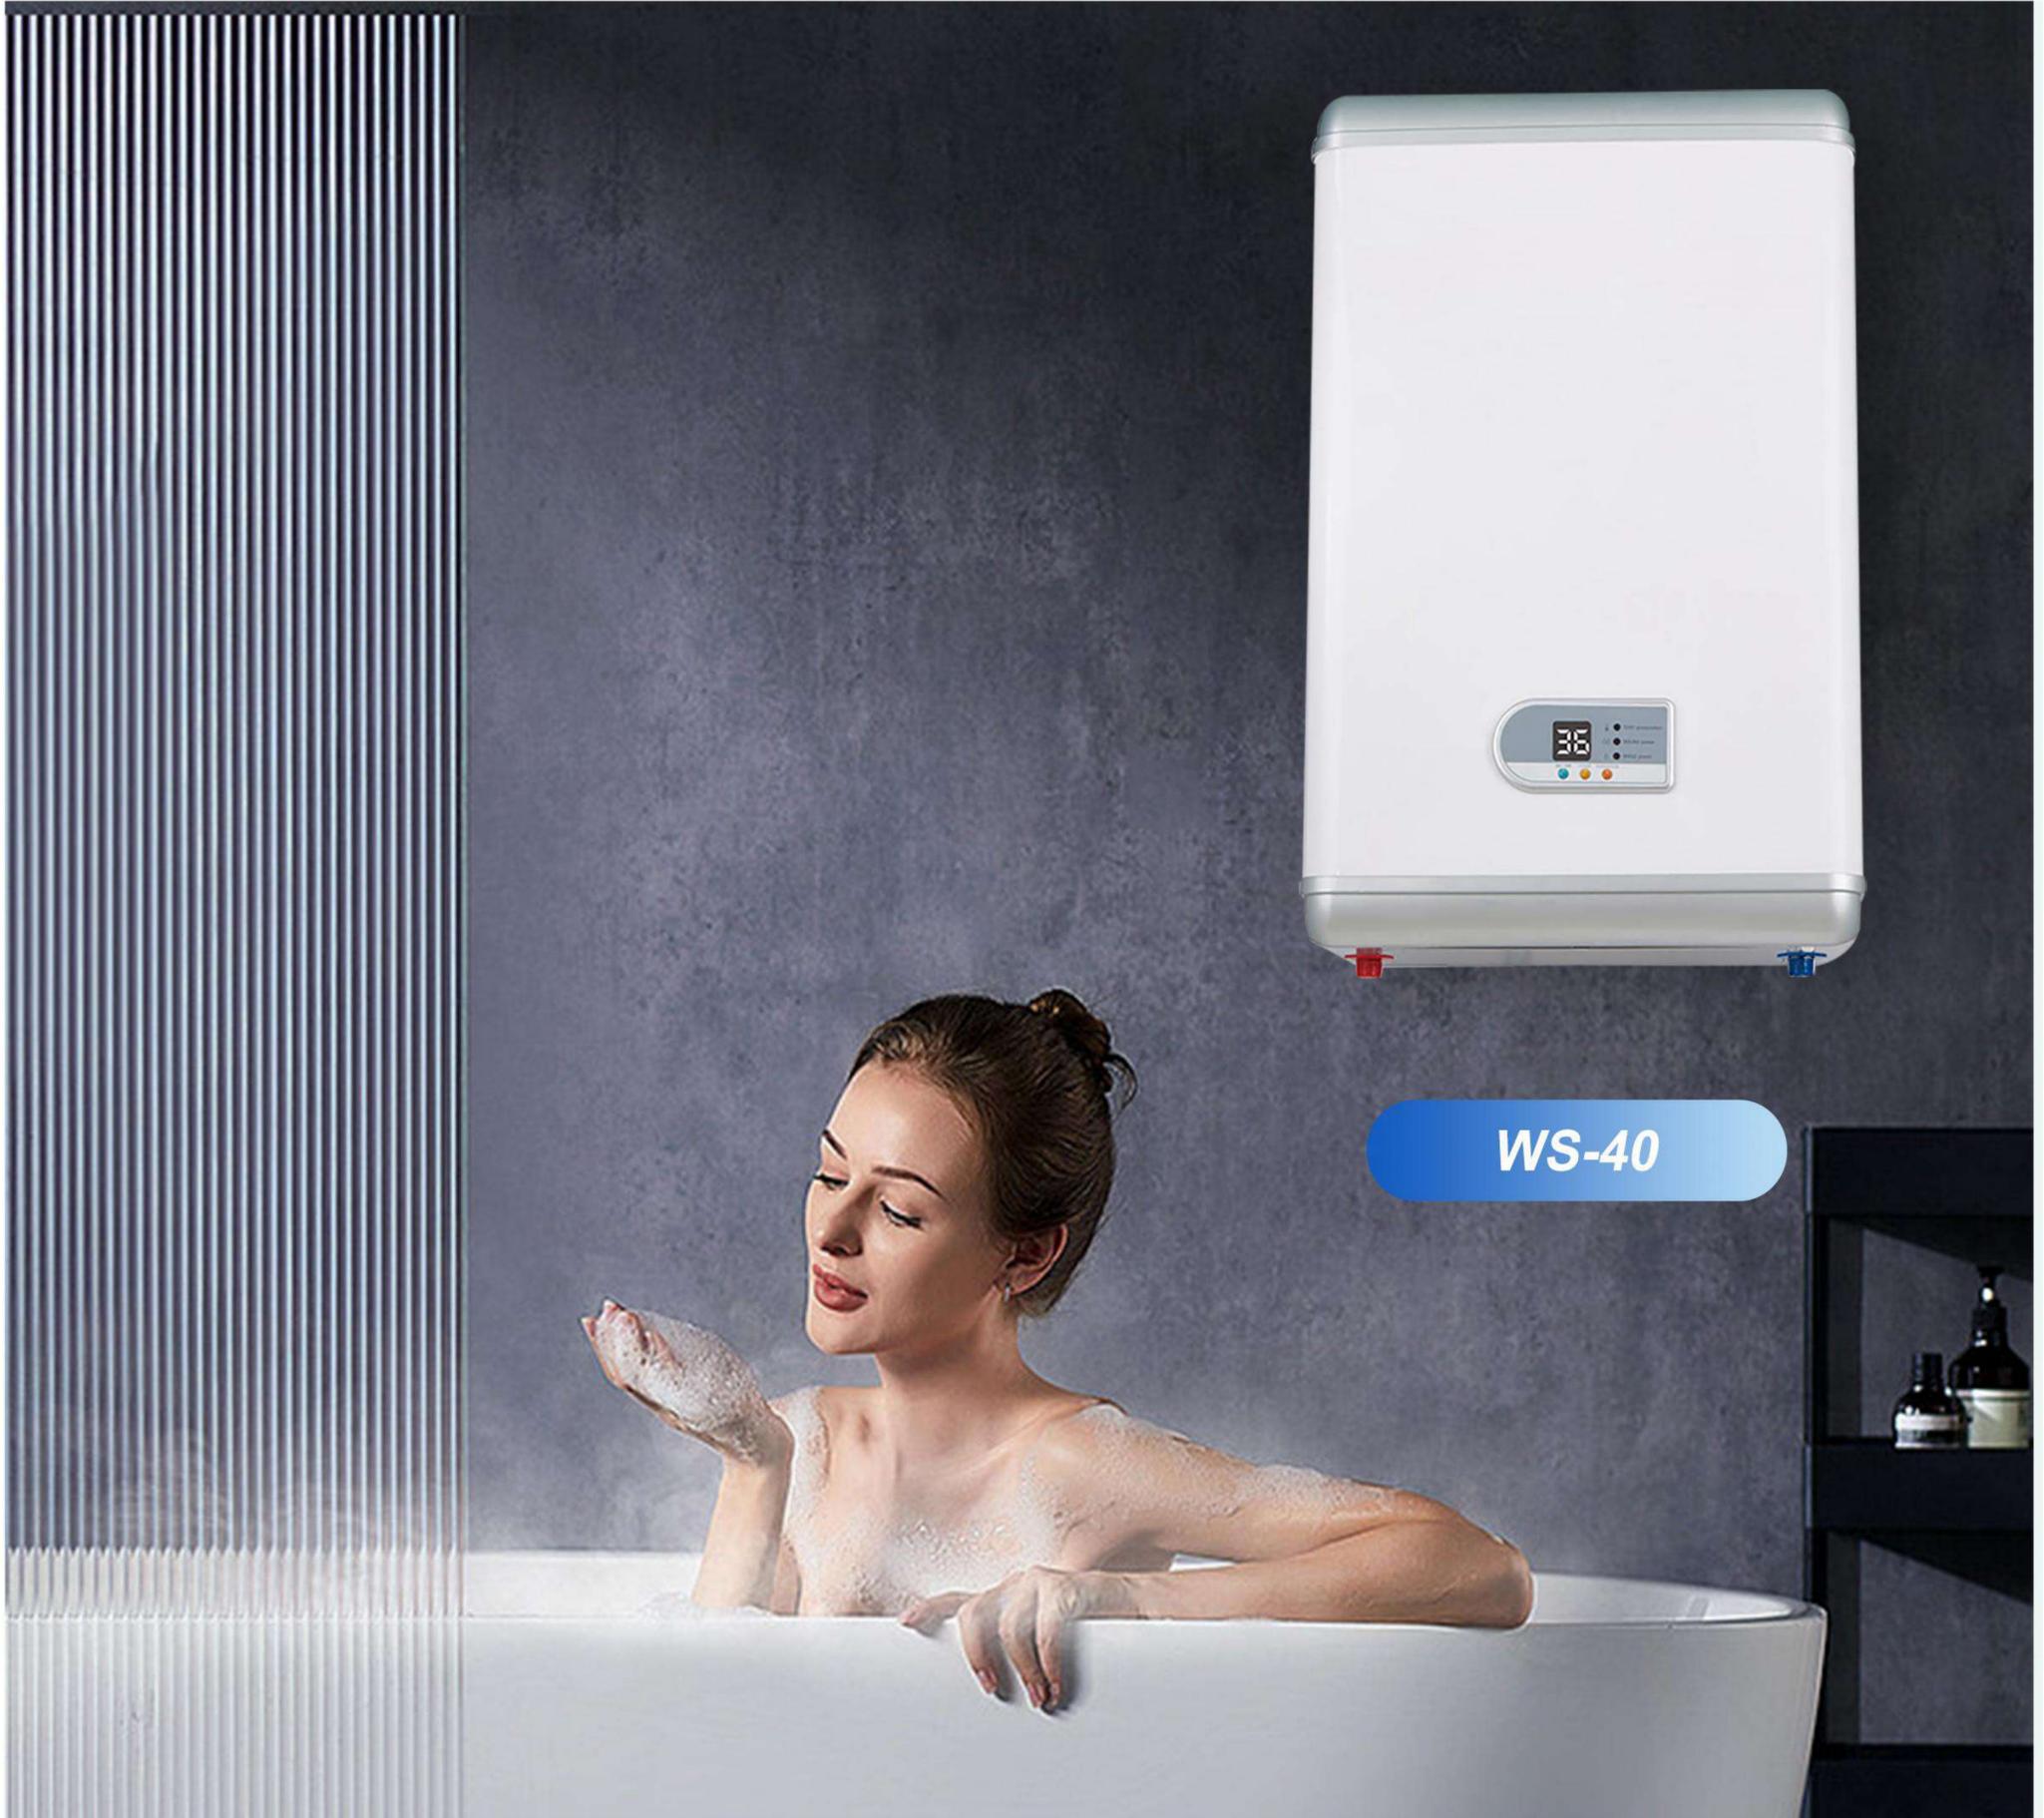

**WS-40**



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Vertical & Horizontal Installation



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



LED Digital Display



High Precision Thermostat

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	535*260*500	735*260*500	535*260*502	535*260*503
Packing size ( mm )	620*335*555	820*335*555	1160*335*555	1390*335*555
N.W.(kg)	12.5	15	18.5	23
G.W.(kg)	13	17	21	27
Loading qty ( 20GP/40HQ )	225/570	170/435	120/305	100/255

# KITCHEN SERIES




**WS-FX01**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity ( L )	8L	10L	15L	25L
Product size ( mm )	300*300*262	300*300*302	350*350*315	380*380*320
Packing size ( mm )	360*360*340	360*360*380	420*420*390	420*420*395
N.W.(kg)	2.5	3	4	6
G.W.(kg)	3	4	5	7
Loading qty ( 20GP/40HQ)	635/1500	570/1345	410/970	405/955

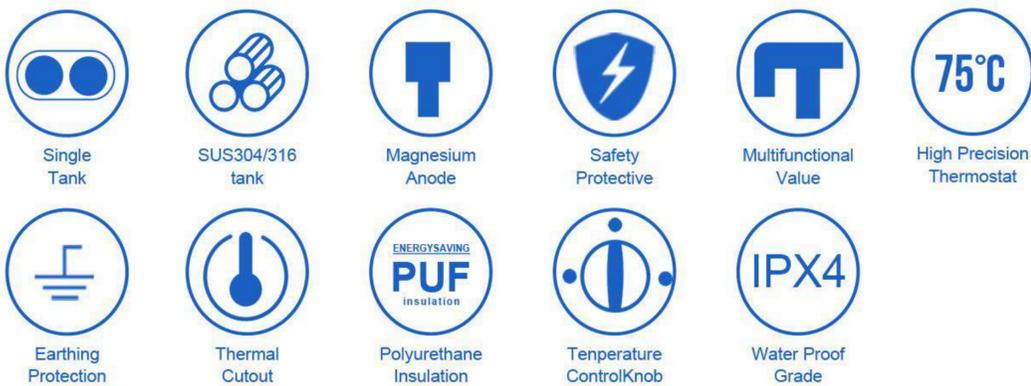

**WS-FX02**

Capacity ( L )	8L	10L	15L	20L	25L
Product size ( mm )	255*255*300	255*255*350	255*255*450	255*255*505	255*255*595
Packing size ( mm )	310*310*380	310*310*430	310*310*530	310*310*585	310*310*675
N.W.(kg)	3.5	3.5	4	5	6
G.W.(kg)	4	4.5	5	6.2	7.5
Loading qty ( 20GP/40HQ)	711/1830	629/1610	510/1320	462/1180	400/1030

# KITCHEN SERIES



**WS-FX02**



Capacity ( L )	8L	10L	15L	20L	25L
Product size ( mm )	255*255*300	255*255*350	255*255*450	255*255*505	255*255*595
Packing size ( mm )	310*310*380	310*310*430	310*310*530	310*310*585	310*310*675
N.W.(kg)	3.5	3.5	4	5	6
G.W.(kg)	4	4.5	5	6.2	7.5
Loading qty ( 20GP/40HQ)	711/1830	629/1610	510/1320	462/1180	400/1030



Capacity ( L )	10L	15L
Product size ( mm )	270*270*375	270*270*465
Packing size ( mm )	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty ( 20GP/40HQ)	563/1650	535/1375



**WS-X1**

# KITCHEN SERIES



Capacity ( L )	10L	15L
Product size ( mm )	270*270*375	270*270*465
Packing size ( mm )	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty ( 20GP/40HQ )	563/1650	535/1375

**WS-X5**



Capacity ( L )	10L	15L
Product size ( mm )	270*270*375	270*270*465
Packing size ( mm )	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty ( 20GP/40HQ )	563/1650	535/1375



**WS-X6**

# KITCHEN SERIES



**WS-X7**



Capacity ( L )	10L	15L
Product size ( mm )	270*270*375	270*270*465
Packing size ( mm )	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty ( 20GP/40HQ )	563/1650	535/1375



**WS-B20**



Capacity ( L )	10L	15L
Product size ( mm )	270*270*375	270*270*465
Packing size ( mm )	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty ( 20GP/40HQ )	563/1650	535/1375

# ENERGY WATER TANK

WS-K1S



Single Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



High Precision Thermostat

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa
- Diameter of water pipes G1/2 Male Inlet/Outlet
- Diameter of Exchange coil G3/8 Male Inlet/Outlet

Capacity ( L )	40L	70L	100L
Product size ( mm )	258*436*720	400*400*874	444*444*874
Packing size ( mm )	790*295*515	930*415*440	935*470*480
N.W.(kg)	10.9	14.5	16.5
G.W.(kg)	11.9	15.5	17.6
Loading qty ( 20GP/40HQ )	216/550	153/390	123/310

# COLD AND HOT WATER HEATER



**WS-HC2D**

-   
Single Tank
-   
SUS304/316 tank
-   
Magnesium Anode
-   
Safety Protective
-   
Multifunctional Value
-   
Earthing Protection
-   
Thermal Cutout
-   
Polyurethane Insulation
-   
Water Proof Grade
-   
High Precision Thermostat
-   
Vertical& Horizontal Installation
-   
Touch Screen
-   
LED Digital Display

Inner tank Material	Stainless steel: 316/304
Body and cover material	White Metal
Rated voltage	220~240V
Rated current	50Hz:2.7A;60Hz:2.9A
Rated refrigerant power	50Hz:450W;60Hz:500W
Temperature range	10°C-75°C
Refrigerant model	R134a 135g
Rated heating power	1300W
Max pressure of tank	1.2 MPa
Annual energy consumption	1595kWh
Capacity ( L )	50L
Product size ( mm )	426*426*870
Packing size ( mm )	480*480*970
N.W.(kg)	33
G.W.(kg)	40
Loading qty ( 20GP/40HQ)	115/290

# HEAT PUMP



**WS-BD1**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity ( L )	200L	300L	400L	500L
Product size ( mm )	756*410*1178	868*466*1362	868*466*1707	868*466*2047
Packing size ( mm )	850*570*1266	960*640*1450	960*640*1795	960*640*2135
N.W.(kg)	43	54	61	77
G.W.(kg)	76	58	66	83
Loading qty ( 20GP/40HQ)	45/105	29/74	23/59	19/50



Capacity ( L )	200L	300L	400L	500L	600L
Product size ( mm )	520*520*1520	560*560*1820	700*700*1540	700*700*1860	700*700*2110
Packing size ( mm )	595*595*1600	635*635*1900	790*790*1630	790*790*1950	790*790*2200
N.W.(kg)	42	53	70	81	91
G.W.(kg)	45.5	58	75	87	98
Loading qty ( 20GP/40HQ)	46/98	34/70	25/50	21/45	19/40



**WS-YD2**

# HEAT PUMP



**WS-YD3**

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:3000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity ( L )	200L	300L	400L	500L
Product size ( mm )	756*410*1178	868*466*1362	868*466*1707	868*466*2047
Packing size ( mm )	850*570*1266	960*640*1450	960*640*1795	960*640*2135
N.W.(kg)	43	54	61	77
G.W.(kg)	76	58	66	83
Loading qty ( 20GP/40HQ)	45/105	29/74	23/59	19/50



Capacity ( L )	200L	300L	400L	500L	600L
Product size ( mm )	520*520*1520	560*560*1820	700*700*1540	700*700*1860	700*700*2110
Packing size ( mm )	595*595*1600	635*635*1900	790*790*1630	790*790*1950	790*790*2200
N.W.(kg)	42	53	70	81	91
G.W.(kg)	45.5	58	75	87	98
Loading qty ( 20GP/40HQ)	46/98	34/70	25/50	21/45	19/40



**WS-YD4**

# INDIRECT WATER HEATER



**WS-RJ1**



Capacity ( L )	80L	100L	120L
Product size ( mm )	990*510*290	1190*510*290	1390*510*290
Packing size ( mm )	1055*565*335	1255*565*335	1455*565*335
N.W.(kg)	20.7	23.6	27.2
G.W.(kg)	22.7	26	31
Loading qty (20GP/40HQ)	140/330	118/275	100/240

## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa
- Material of tubular exchanger: SUS316L

# INDIRECT WATER HEATER



**NEW**



- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Earthing Protection
- Thermal Cutout
- Polyurethane Insulation
- Anti-freeze Protection
- High Precision Thermostat
- Vertical & Horizontal Installation
- Water Proof Grade
- Multifunctional Value

**WS-RJ2**

Capacity ( L )	30L	50L	80L	100L
Product size ( mm )	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size ( mm )	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty ( 20GP/40HQ )	280/730	190/495	136/350	113/290

- Single Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Value
- Vertical & Horizontal Installation
- Earthing Protection
- Thermal Cutout
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- High Precision Thermostat

Capacity ( L )	30L	50L	80L	100L	120L	150L
Product size ( mm )	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size ( mm )	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty ( 20GP/40HQ )	275/690	203/510	141/350	120/300	104/260	88/220



**WS-A3**

# SOLAR PHOTOVOLTAIC WATER HEATER



## SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Product name	Solar Photovoltaic Water Heater
Mounting type	Vertical or Horizontal
Control panel	Mechanical or Digital or WIFI
Power	2000w
Tank capacity	30L 50L 80L 100L150L
Effluent temperature	30-75°C
DC power cable	2*2.5mm <sup>2</sup>
Heating mode	Photoelectric dual-purpose
Body shell color	White
Temperature of DC control	65°C ON 75°C OFF



## **ZHONGSHAN WIE ELECTRIC APPLIANCE CO., LTD**

**Add:** No. 73 CHENGYE ROAD, BUILDING 2, FLOOR 1, DACEN INDUSTRIAL,  
HUANGPU TOWN, ZHONGSHAN CITY. GUANG DONG PROVINCE, CHINA

**Tel:** +86-760-23230111 | **Fax:**+86-760-23224918

**Mobile/WhatsApp/Wechat:**+86-15927247552

**Web:** <http://www.wie2002.com>

<http://www.wissen.en.alibaba.com>