

PRODUCT CATALOGUE

Household Ventilation Fan





COMPANY OVERVIEW



1974

Founded in


50000 m²

Factory area

About Us

Founded in 1974, we have been a leading expert in air movement solutions for 50 years, specializing in household and industrial applications. Our product portfolio includes ventilation fans, electric fans, and air circulators.

With five decades of R&D excellence, we proudly introduce our next-generation ventilation fan series—engineered to enhance indoor air quality and promote healthier living for millions worldwide.

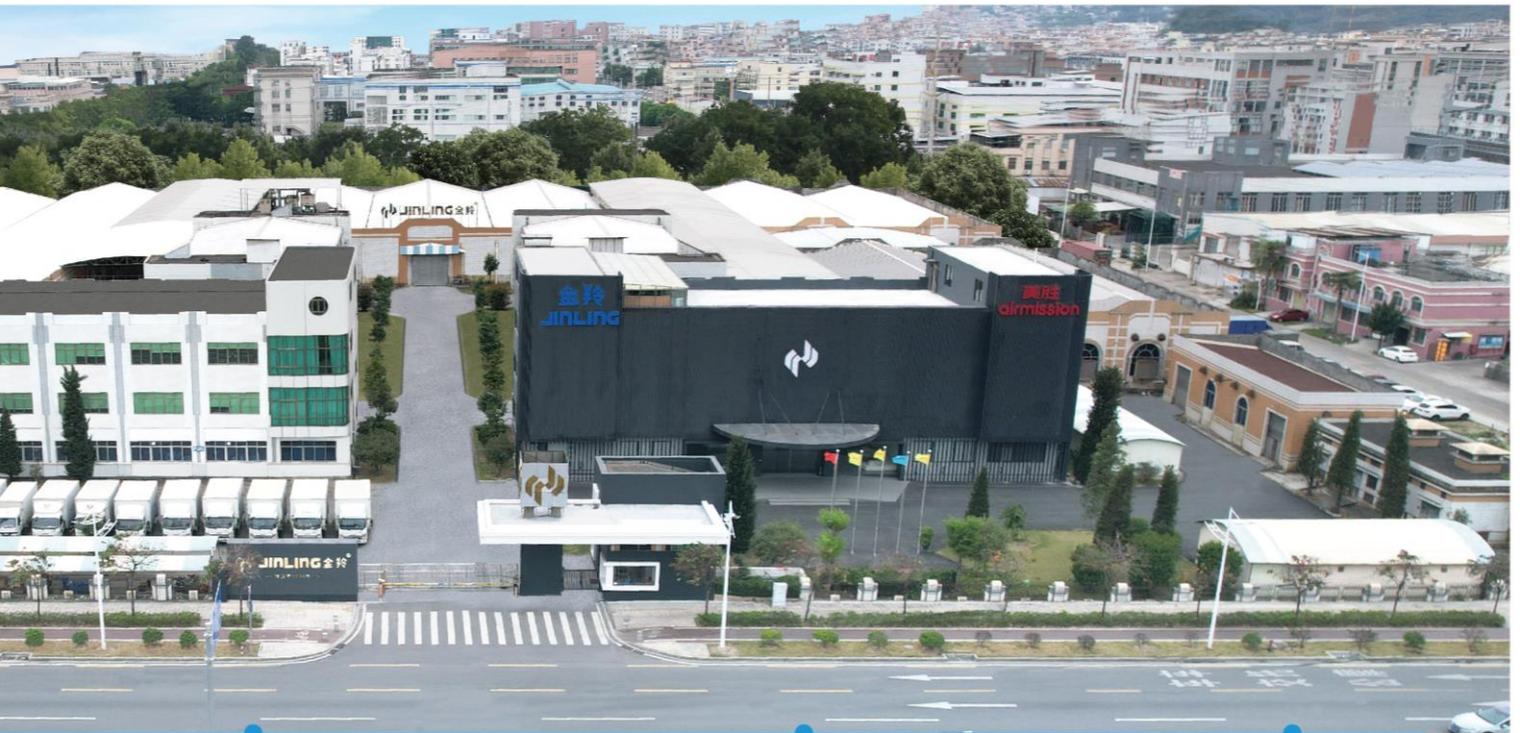

500

Employees

20

Production lines

5 million

Annual Production



Core Technology Matrix



18

ENGINEERS

Engineering Team

Our 18-member engineering team drives continuous product innovation while leading the development and revision of 6 technical standards across national, provincial and industry levels.

UL

ETL

ITS

National-Level Laboratory

Our lab is accredited by **UL, ETL, and ITS**, and has been designated as the **national** energy efficiency filing authority and testing laboratory for ventilation fans and electric fans.

Smart Ventilation, Smarter Living

A variety of innovative features to meet different usage needs:



Timer



Humidity



Humidity
Timer



Motion
Sensor



Motion &
Humidity
Sensor



Mosquito
lure and kill
function



Virus elimi-
nation



APP & Voice
Control



DC Inverter Motor



High efficiency | Reliable | Durable
Long lifespan | Energy-saving

▶ **89%**

89% higher energy efficiency vs conventional motors.

▶ **35** d(B)

Near-silent operation at <35dB (1 meter test distance).

▶ **5** Year

5- year warranty on DC motors with global after- sales service.

▶ **50000**

50,000 Cycle Durability test.

▶ **2** Million

2 million+ Units sold globally (BLDC ventilation fan)

SMART MOTION SENSOR VENTILATION FAN




■ Sensing Range



Passive Infrared Sensor
Detects body heat/
movement




	Nobody in room	Someone Entres	Leave	
AM-APC15/20K1	Standby mode	198 m ³ /h	198 m ³ /h	Standby mode
			15 min	
AM-APC15/20K	174 m ³ /h	198 m ³ /h	198 m ³ /h	174 m ³ /h
			10 min	

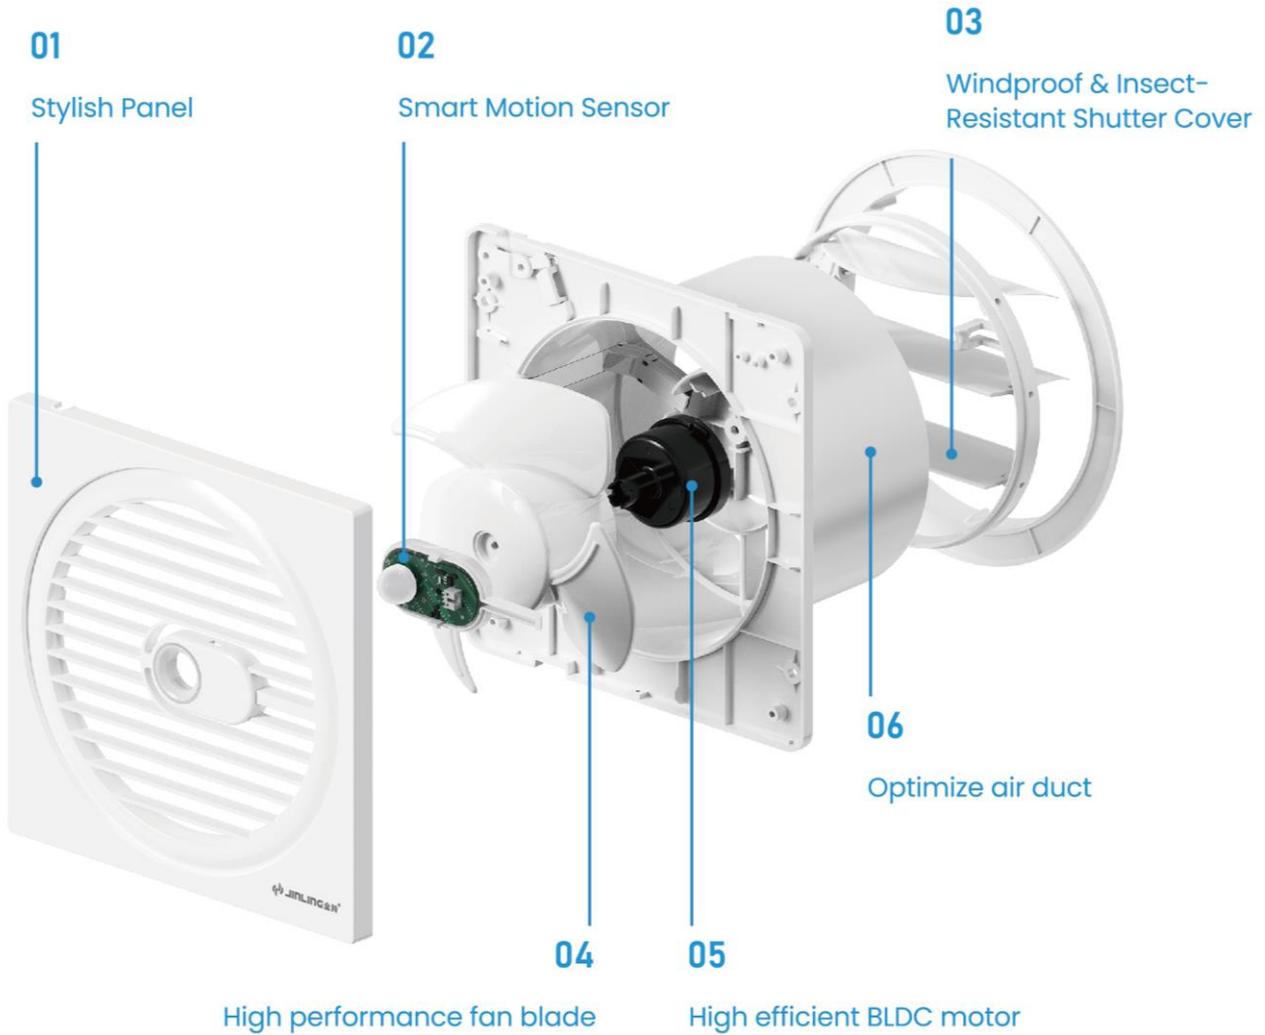

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-APC15K	110-250V~50/60Hz	5/3	156/126	1850	42/35	Ø 152-155	18	13.5	2-speed
AM-APC20K	110-250V~50/60Hz	6/4	198/174	1650	42/35	Ø 182-185	12	13	2-speed
AM-APC15K1	110-250V~50/60Hz	5	156	1850	42	Ø 152-155	18	13.5	Single speed
AM-APC20K1	110-250V~50/60Hz	6	198	1650	42	Ø 182-185	12	13	Single speed

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Size (mm)
	a	b	c	d	e		20'GP	40'GP	40'HQ	
AM-APC15K AM-APC15K1	200	200	18	106	Ø150	635x405x450	4050	8100	19720	150/6"
AM-APC20K AM-APC20K1	250	250	19	119	Ø180	530x450x545	2640	5280	6336	200/8"




MOSQUITO-KILLING VENTILATION FAN



- 01** Patented Blade Design for Mosquito-Killing and High Airflow
- 02** Nanoscale Mosquito-Attracting Photonic LED
- 03** High efficient BLDC motor
- 04** Stylish Minimalist Panel
- 05** Optimize Air Duct

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-APC15W	110-250V~50/60Hz	7	108	1650	42	Ø152-155	18	11.5	Single speed
AM-APC20W	110-250V~50/60Hz	9	174	1450	43	Ø182-185	12	11.2	Single speed

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Size (mm)
	a	b	c	d	e	f		20'GP	40'GP	40'HQ	
AM-APC15W	203	203	41	98	Ø150	34	700x515x500	2304	4896	6120	150/6"
AM-APC20W	250	250	51	90	Ø180	24	610x555x630	1296	2736	3648	200/8"




SLIM AND SILENT VENTILATION FAN



- 01 High performance fan blade design
- 02 High efficient BLDC motor
- 03 Optimize air duct
- 04 Windproof & Insect-Resistant Shutter Cover
- 05 Stylish Panel

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-APC10A	110-250V-50/60Hz	4/2	60/42	2150	39/35	∅ 105-110	20	10.7	2-speed
AM-APC15A	110-250V-50/60Hz	5/2.5	150/126	1950	42/35	∅ 152-155	18	13.7	2-speed
AM-APC20A	110-250V-50/60Hz	6/3	228/180	1800	45/38	∅ 182-185	12	15.6	2-speed
AM-APC25A	110-250V-50/60Hz	7/4	348/270	1500	46/41	∅ 235-240	12	20.6	2-speed


Model	Dimensions (mm)					Package (mm)	Loading Qty.			Size (mm)
	a	b	c	d	e		20'GP	40'GP	40'HQ	
AM-APC10A	152	152	14	85	∅98	535x330x345	9240	18480	21560	100/4"
AM-APC15A	202	202	16	107	∅150	635x385x450	4860	9720	11340	150/6"
AM-APC20A	252	252	19	113	∅180	530x420x545	2640	5280	6336	200/8"
AM-APC25A	286	286	19	130	∅230	605x470x630	1620	4104	4560	200/8"



WINDOW VENTILATION FAN




- 01 Hidden Fan Blade Design
- 02 High performance fan blade design
- 03 High efficient BLDC motor
- 04 Optimize air duct
- 05 Windproof & Insect-Resistant Shutter Cover

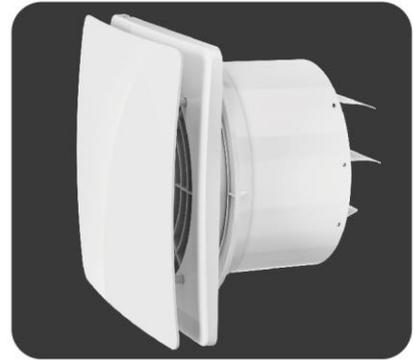

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-APC10B	110-250V-50/60Hz	4	51	2300	37	Ø 105-110	18	8.2	Single speed
AM-APC15B	110-250V-50/60Hz	5	120	1600	39	Ø 152-155	16	12.6	Single speed
AM-APC20B	110-250V-50/60Hz	7	180	1650	42	Ø 182-185	12	13	Single speed

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Size (mm)
	a	b	c	d	e		20'GP	40'GP	40'HQ	
AM-APC10B	150	150	35	85	Ø98	495x405x350	6048	12960	15120	100/4"
AM-APC15B	200	200	40	105	Ø150	635x440x445	3600	7200	18640	150/6"
AM-APC20B	250	250	50	119	Ø180	535x510x550	2112	4224	4416	200/8"



WINDOW MOUNTED VENTILATION FAN



B8/B8H



Y10

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC10-2-30(B8/B8H/Y10DC)	110-250V-50/60Hz	4	60	2100	38	Ø 100-110	BLDC Motor
APC15-2-30(B8/B8H/Y10DC)	110-250V-50/60Hz	5	180	1850	39	Ø 152-155	BLDC Motor
APC20-3-30(B8/B8H/Y10DC)	110-250V-50/60Hz	6	246	1800	42	Ø 182-185	BLDC Motor
APC10-2-30(B8/B8H/Y10)	220-240V-50Hz	10	66	2100	38	Ø 100-110	/
APC15-2-30(B8/B8H/Y10)	220-240V-50Hz	16	180	1850	39	Ø 152-155	/
APC20-3-30(B8/B8H/Y10)	220-240V-50Hz	23	258	1800	42	Ø 182-185	/
APC25-4-30(B8/B8H/Y10)	220-240V-50Hz	23	378	1600	45	Ø 233-240	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC10-2-30(B8DC)	150	150	12	78	Ø98	510x330x345	10340	21620	22540	20	9	100/4"
APC15-2-30(B8DC)	200	200	12	99	Ø150	635x370x450	4860	9990	11970	18	11	150/6"
APC20-3-30(B8DC)	250	250	13	104	Ø180	535x395x550	2928	5952	6960	12	10	200/8"
APC25-4-30(B8DC)	283	283	15	128	Ø230	605x470x630	1908	4104	4560	12	14	200/8"

12mm


Ultra-thin panel

38dB

Ultra-quiet

AC/DC

2 motor for option



B8H
Upgraded rear cover baffle



B8/Y10
Rear cover blocks backflow of outside wind

WINDOW MOUNTED VENTILATION FAN



B2



Y16

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC10-2-30(B2/Y16DC)	110-250V-50/60Hz	4	66	1800	40	Ø 104-110	BLDC Motor
APC15-2-30(B2/Y16DC)	110-250V-50/60Hz	5	174	1350	43	Ø 151-160	BLDC Motor
APC10-2-30(B2/Y16)	220-240V-50Hz	10	66	1800	40	Ø 104-110	/
APC15-2-30(B2/Y16)	220-240V-50Hz	16	180	1350	44	Ø 151-160	/


Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC10-2-30(B2DC)	150	150	30	56	Ø105	320x205x345	10368	21312	25256	20	7.5	100/4"
APC15-2-30(B2DC)	200	200	32	57	Ø150	435x205x450	5720	11880	14432	18	10	150/6"

Slim

Minimalist Design

AC/DC

2 motor for option






WINDOW MOUNTED VENTILATION FAN

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC10-2-30(DIDC)	110-250V-50/60Hz	4	66	1800	40	Ø 112-116	BLDC Motor
APC15-2-30(DIDIDC)	110-250V-50/60Hz	5	174	1350	43	Ø 161-165	BLDC Motor
APC10-2-30(DI)	220-240V-50Hz	10	66	1800	40	Ø 112-116	/
APC15-2-30(DI)	220-240V-50Hz	16	180	1350	44	Ø 161-165	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC10-2-30(DIDIDC)	161	161	41	56	Ø102	545x340x365	8160	17160	20020	20	12.5	100/4"
APC15-2-30(DIDIDC)	206	206	41	59	Ø148	660x325x465	5292	11322	12852	18	14	150/6"



AC/DC



Built-in louver-specific stepping motor

2 motor for option

Electric front louvers

High-Buildings

Suitable for high-rise buildings

WINDOW MOUNTED VENTILATION FAN



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC15-2-30(B5)	220-240V-50Hz	16	186	1600	42	Ø 155	/
APC20-2-30(B5)	220-240V-50Hz	23	264	1500	48	Ø 185	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC15-2-30(B5)	200	200	38	54	Ø150	625x310x440	5670	11970	14364	18	20	150/6"
APC20-2-30(B5)	250	250	51	62	Ø180	520x355x540	5280	11040	12880	12	25.5	200/8"




ABS

Pull cord design

Made of high-quality ABS

Ensuring more stable product performance





WINDOW MOUNTED VENTILATION FAN


Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
AM-APC15C	110-250V-50/60Hz	5/4	180/150	1900	41/38	Ø 185	BLDC Motor
AM-APC20C	110-250V-50/60Hz	6/5	330/288	1800	44/40	Ø 250	BLDC Motor
APC15-2-30(C3)	220-240V-50Hz	16	180	1950	38	Ø 185	/
APC20-3-30(C3)	220-240V-50Hz	23	360	1750	42	Ø 250	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
AM-APC15C	208	43	43	45	Ø176	675x345x480	3456	8568	9180	18	15.5	150/6"
AM-APC20C	275	42	51	36	Ø238	610x405x635	2184	4544	5248	12	13	200/8"
APC15-2-30(C3)	208	43	43	45	Ø176	425x345x480	4632	9600	11040	18	15.5	150/6"
APC20-3-30(C3)	275	42	51	36	Ø238	610x405x635	2160	4500	5136	12	18.5	200/8"

38_{dB} AC/DC

Ultra-quiet 2 motor for option

The fan blade cover uses a screw and nut locking design



WINDOW MOUNTED VENTILATION FAN



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC15-2-30(C1)	220-240V-50Hz	16	192	1900	40	Ø 185	/
APC20-2-30(C1)	220-240V-50Hz	23	360	1600	42	Ø 240	/


Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC15-2-30(C1)	205	160	45	26	Ø175	655x245x485	4560	9168	11244	12	10.5	150/6"
APC20-2-30(C1)	275	220	51	40	Ø235	545x307x620	2184	4544	5248	8	12.5	200/8"

PP+AS



Made of high-quality PP+AS Pull cord design

Ensuring more stable product performance






WINDOW MOUNTED VENTILATION FAN

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC15-2-30(B6D1DC)	110-250V~50/60Hz	5	150	1350	36	Ø 165-170	BLDC Motor
APC20-4-30(B6)	220-240V~50Hz	25	420	1080	45	Ø 233-240	/
APC20-4-30(B6D1)	220-240V~50Hz	25	420	1080	45	Ø233-240	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC15-2-30(B6D1DC)	200	200	40	99	Ø164	610x405x635	4050	8100	9720	18	14.5	150/6"
APC20-4-30(B6)	283	283	38	121	Ø232	665x305x610	1608	3456	4032	8	18.5	200/8"
APC20-4-30(B6D1)	283	283	38	121	Ø232	665x305x610	1608	3456	4032	8	18.5	200/8"



Electric / Wind pressure rear cover
Rear cover blocks backflow of outside wind

AC/DC

High-Buildings

2 motor for option

Suitable for high-rise buildings

WINDOW MOUNTED VENTILATION FAN




Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC10-Y3-1	220-240V~50Hz	10	66	2200	40	Ø 105	/
APC15-Y3-1	220-240V~50Hz	16	174	1600	44	Ø 155	/
APC20-Y3-1	220-240V~50Hz	23	198	1800	47	Ø 185	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC10-Y3-1	175	168	39	70	Ø98	550x350x400	5400	11340	13608	18	13	100/4"
APC15-Y3-1	220	221	40	80	Ø149	690x395x495	2880	7344	7650	18	19	150/6"
APC20-Y3-1	250	255	40	80	Ø179	755x280x550	2688	5760	6480	12	17.5	200/8"

AC/DC

ABS



2 motor for option

Made of high-quality ABS

Front louvers



WINDOW MOUNTED VENTILATION FAN (With Mosquito Net)

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APC10-0-2	220-240V-50Hz	10	66	2100	40	Ø 100-110	/
APC15-2-2	220-240V-50Hz	16	150	1850	43	Ø 155-160	/
APC20-3-2	220-240V-50Hz	23	246	1800	45	Ø 182-185	/
APC10-0-2(DC)	110-250V-50/60Hz	4	66	1850	40	Ø 100-110	BLDC Motor
APC15-2-2(DC)	110-250V-50/60Hz	5	150	1800	43	Ø 155-160	BLDC Motor
APC20-3-2(DC)	110-250V-50/60Hz	6	240	1800	43	Ø 182-185	BLDC Motor

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APC10-0-2	150	150	26	56	Ø105	485x335x350	10080	20160	23520	20	11.5	100/4"
APC15-2-2	200	200	27	56	Ø150	645x300x450	5670	12420	14526	18	14.5	150/6"
APC20-3-2	230	230	32	52	Ø180	500x310x510	3696	9216	10080	12	12	200/8"
APC10-0-2(DC)	150	150	26	56	Ø105	485x335x350	10080	20160	23520	20	7.5	100/4"
APC15-2-2(DC)	200	200	27	56	Ø150	645x300x450	5670	12420	14526	18	10	150/6"
APC20-3-2(DC)	230	230	32	52	Ø180	500x310x510	3696	9216	10080	12	10	200/8"




Prevent insects from entering

7 Blades

Maximum air delivery

AC/DC

2 motor for option



SMART MOTION SENSOR VENTILATION FAN




Sensing Range



Passive Infrared Sensor
Detects body heat/
movement




	Nobody in room	Someone Entres	Leave	
AM-BPT15K1K1C	Standby mode	162 m ³ /h	15 min	Standby mode
AM-BPT15K1K	108 m ³ /h	162 m ³ /h	10 min	108 m ³ /h

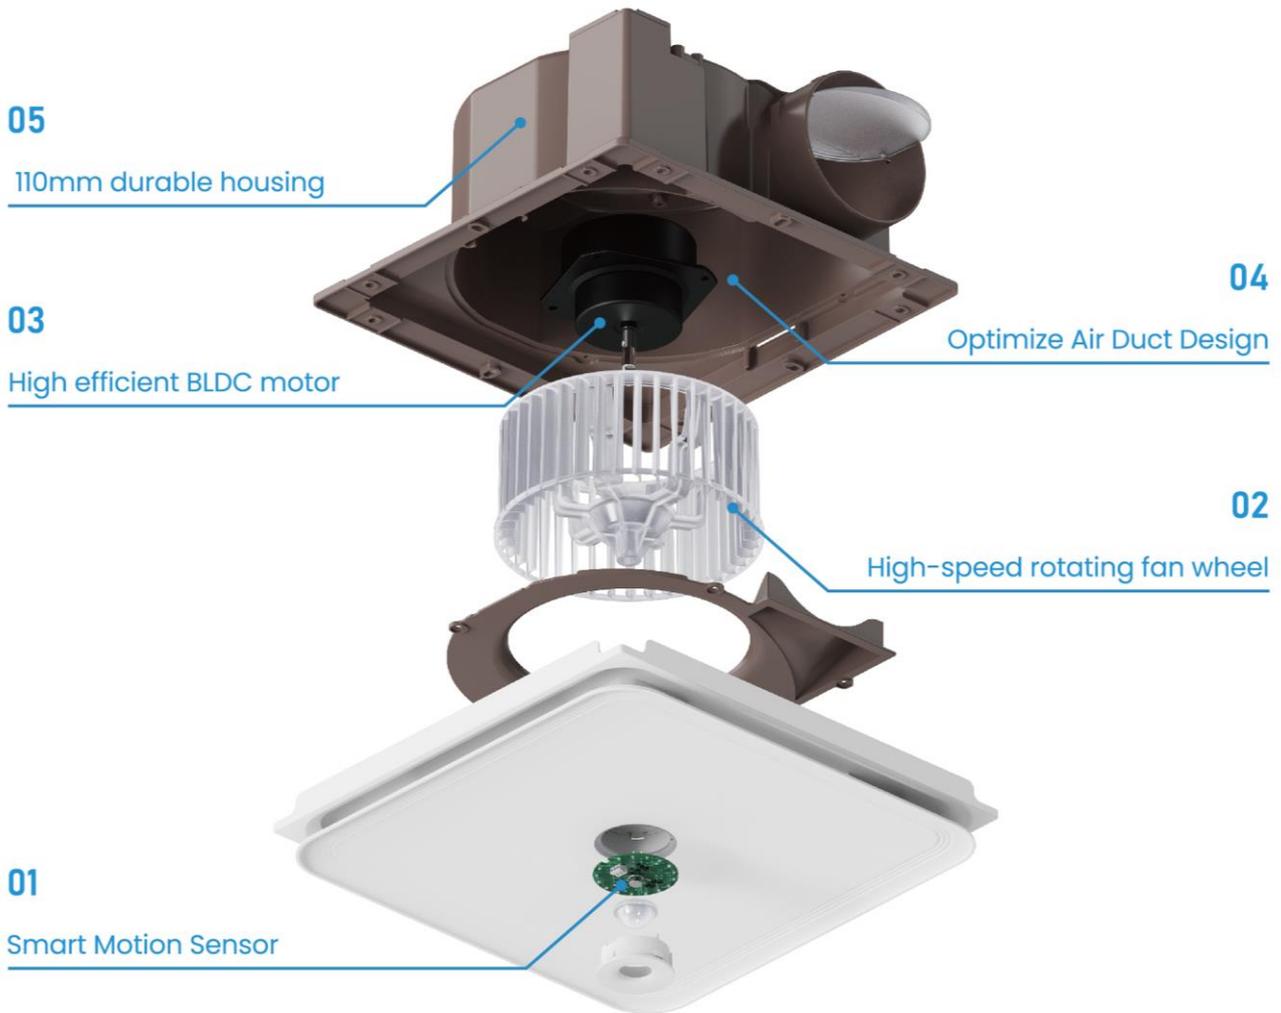

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-BPT15K	110-250V-50/60Hz	11/5	162/108	820	125	44/36	300x300	4	7	2-speed
AM-BPT15K1	110-250V-50/60Hz	11	162	820	125	44	300x300	4	7	Single speed
AM-BPT15KC	110-250V-50/60Hz	11/5	162/108	820	125	44/36	235x235	4	7	2-speed
AM-BPT15K1C	110-250V-50/60Hz	11	162	820	125	44	235x235	4	7	Single speed

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ	
AM-BPT15K AM-BPT15K1	300	35	260	230	110	14	810x360x370	1008	2016	2352	Ø100mm
AM-BPT15C AM-BPT15K1C	300	40	260	230	110	14	810x360x370	1008	2016	2352	Ø100mm



• Integrated ceiling installation: AM-BPT15K/AM-BPT15K1

• Common ceiling installation: AM-BPT15KC/AM-BPT15K1C

MOSQUITO-KILLING VENTILATION FAN





■ No Mosquito Disturbance

Breathe Freely and Comfortably, 156m³/h High Suction Power for Ventilation and Rapid Mosquito Removal.

■ Rated Power 11W

The new model is more optimized compared to ordinary AC motor products, saving an average of 60% in electricity, energy-efficient and safe.

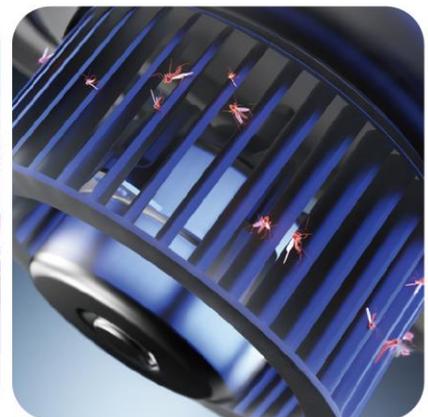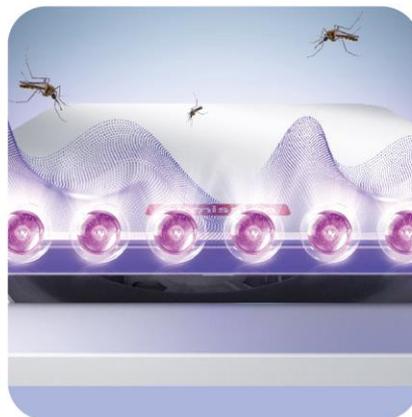

■ Installation Scenarios



Residential



Villa




Restaurant



Courtyard




Farm

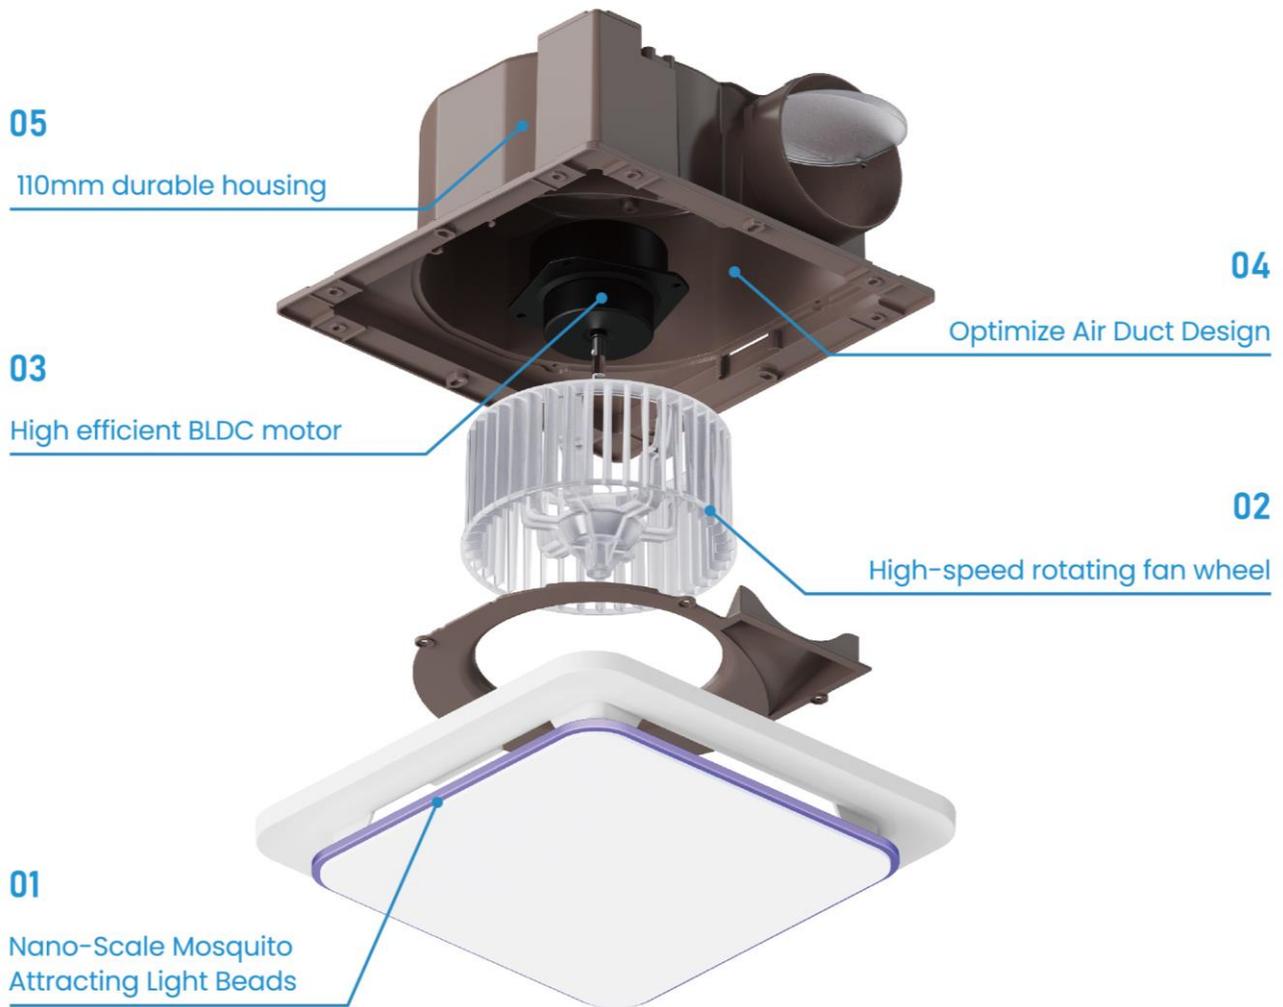

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-BPT15W	110-250V~50/60Hz	11	156	820	125	44	300x300	4	8	Single speed
AM-BPT15W1	110-250V~50/60Hz	11	156	820	125	44	235x235	4	8	Single speed

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ	
AM-BPT15W	300	35	260	230	110	14	810x360x370	1008	2016	2352	Ø100 mm
AM-BPT15W1	300	40	260	230	110	14	810x360x370	1008	2016	2352	Ø100 mm

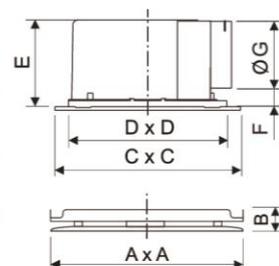

- Integrated ceiling installation: AM-BPT15W
- Common ceiling installation: AM-BPT15W1

SLIM AND SILENT DUCT VENTILATION FAN




Low noise and energy saving

- BLDC Motor
- Labyrinth air intake grille panel
- High-speed rotating fan wheel
- Optimized air intake curvature
- The product is more silent



Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
AM-BPT10A	110-250V~50/60Hz	11/4	138/90	900	125	43/36	200x200	8	9.7	2-speed
AM-BPT15A	110-250V~50/60Hz	11/5	168/120	820	125	45/36	235x235	8	10.5	2-speed
AM-BPT20A	110-250V~50/60Hz	11/6	186/126	820	125	46/36	260x260	8	11.5	2-speed

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ	
AM-BPT10A	247	19	238	198	110	14	560x270x560	2560	5376	6048	Ø100 mm
AM-BPT15A	289	19	260	230	110	14	555x315x645	1728	4032	4704	Ø100 mm
AM-BPT20A	317	19	306	258	110	14	560x340x695	1632	3360	3864	Ø100 mm





DUCT-CONNECTING VENTILATION FAN (BLDC Motor)

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT15-16-23(P12GDC)	110-250V-50/60Hz	11	150	820	125	44	230x230	BLDC Motor
BPT15-16-23(P12G)	220-240V-50Hz	28	156	860	100	43	230x230	/

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT15-16-23 (P12GDC)	300	29	260	230	110	14	810x360x370	1008	2016	2352	4	7	Ø100mm
BPT15-16-23(P12G)	300	29	260	230	110	14	675x350x700	1224	2448	2856	8	15	Ø100mm


AC/DC



2 motor for option

Ceiling-mounted Installation

Modern Style Panel Design



VENTILATION FAN WITH LIGHT (BLDC Motor / LED Lighting)



Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT15-16-23(P12DDC)	110-250V-50/60Hz	11	150	820	125	44	230x230	BLDC Motor
BPT15-16-23(P12D)	220-240V-50Hz	44	150	800	105	41	230x230	/

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT15-16-23 (P12DDC)	310	25	260	230	110	14	810x360x370	1104	2256	2632	4	8	Ø100mm
BPT15-16-23(P12D)	310	25	260	230	110	14	810x360x370	1104	2256	2632	4	10.5	Ø100mm

AC/DC




110mm

2 motor for option

Lighting and Ventilation 2-in-1

110mm durable housing



ULTRA-THIN ULTRA-QUIET DUCT VENTILATION FAN



C



MC

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
AM-BPT15C	110-250V-50/60Hz	11/5	162/108	820	125	44/36	235x235	BLDC Motor
AM-BPT15MC	110-250V-50/60Hz	11/5	162/108	820	125	44/36	300x300	BLDC Motor

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
AM-BPT15C	300	40	260	230	110	14	810x360x370	1008	2016	2352	4	7	Ø100mm
AM-BPT15MC	300	35	260	230	110	14	810x360x370	1008	2016	2352	4	7	Ø100mm


AC/DC 36dB 110mm

2 motor for option

Ultra-quiet

110mm durable housing

Integrated ceiling installation: AM-BPT15MC
Common ceiling installation: AM-BPT15C



HIGH AIRFLOW SILENT DUCT VENTILATION FAN



P12A



P12B

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT10-12-30(P12A)	220-240V-50Hz	26	132	850	85	39	200x200	/
BPT15-16-23(P12A)	220-240V-50Hz	28	168	800	105	39	230x230	/
BPT20-20-26(P12A)	220-240V-50Hz	32	186	820	120	42	290x290	/
BPT10-12-20(P12B)	220-240V-50Hz	26	132	850	85	39	200x200	/
BPT15-16-23(P12B)	220-240V-50Hz	28	168	800	105	39	230x230	/
BPT20-20-26(P12B)	220-240V-50Hz	32	186	820	120	42	290x290	/

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT10-12-30(P12A) BPT10-12-20(P12B)	246	20	239	198	110	14	555x270x535	2688	5504	6872	8	12.5	Ø100mm
BPT15-16-23(P12A) BPT15-16-23(P12B)	288	20	260	230	110	14	555x315x645	1968	4104	4704	8	14.5	Ø100mm
BPT20-20-26(P12A) BPT20-20-26(P12B)	345	20	306	258	110	14	555x350x695	1440	3024	3568	8	16.5	Ø100mm


AC/DC 110mm

2 motor for option

110mm durable housing

39dB

Ultra-quiet



METAL SHELL DUCT VENTILATION FAN



P5A



P5B

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT10-12-30(P5A)	220-240V-50Hz	26	132	800	75	40	200x200	/
BPT10-12-30(P5B)	220-240V-50Hz	26	132	800	75	40	230x230	/
BPT15-12-30(P5A)	220-240V-50Hz	28	168	800	95	42	290x290	/
BPT15-12-30(P5B)	220-240V-50Hz	28	168	800	95	39	200x200	/
BPT15-12-30(P5HA)	220-240V-50Hz	35	240	1100	115	39	230x230	/
BPT15-12-30(P5HB)	220-240V-50Hz	35	240	1120	115	42	290x290	/


Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT10-12-30(P5A) BPT10-12-30(P5B)	246	20	240	195	139	38	525x290x725	1584	3168	3564	6	15	Ø100mm
BPT15-12-30(P5A) BPT15-12-30(P5B)	288	20	270	230	139	38	810x360x395	1004	2060	2286	4	13.5	Ø100mm
BPT15-12-30(P5HA) BPT15-12-30(P5HB)	345	20	270	230	139	38	810x360x395	1004	2060	2286	4	13.5	Ø100mm

AC/DC

2 motor for option



- Detachable Outlet
- Metal Shell



HIGH AIRFLOW SILENT DUCT VENTILATION FAN



P7A



P7B

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT10-12-30(P7A)	220-240V-50Hz	26	132	1200	65	45	200x200	/
BPT15-12-30(P7A)	220-240V-50Hz	28	168	1000	98	46	240x240	/
BPT20-12-30(P7A)	220-240V-50Hz	32	186	1000	110	47	290x290	/
BPT10-12-30(P7B)	220-240V-50Hz	26	132	1200	65	45	200x200	/
BPT15-12-30(P7B)	220-240V-50Hz	28	168	1000	98	46	240x240	/
BPT20-12-30(P7B)	220-240V-50Hz	32	186	1000	110	47	290x290	/


Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT10-12-30(P7A) BPT10-12-30(P7B)	246	20	239	195	150	29	520x270x575	2112	4410	4904	6	10	Ø100mm
BPT15-12-30(P7A) BPT15-12-30(P7B)	288	20	280	231	156	29	535x310x660	1578	3204	3690	6	11.5	Ø100mm
BPT20-12-30(P7A) BPT20-12-30(P7B)	345	20	337	289	158	29	550x370x765	1146	2334	2718	6	13.5	Ø100mm

AC/DC

2 motor for option



- Detached from the body





P6A



P6B

SLIM HIGH AIRFLOW SILENT DUCT VENTILATION FAN

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
BPT15-12-30(P6A)	220-240V-50Hz	28	168	800	93	42	235x235	/
BPT15-12-30(P6B)	220-240V-50Hz	28	168	800	93	42	235x235	/
BPT15-12-30(P6HA)	220-240V-50Hz	35	240	1100	115	47	235x235	/
BPT15-12-30(P6HB)	220-240V-50Hz	35	240	1100	115	47	235x235	/


Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
BPT15-12-30(P6A) BPT15-12-30(P6HA)	288	20	270	230	140	27	650x310x325	1632	3782	4032	4	8	Ø100mm
BPT15-12-30(P6B) BPT15-12-30(P6HB)	288	20	270	230	140	27	650x310x325	1632	3782	4032	4	8	Ø100mm

AC/DC

2 motor for option



High air volume



INLINE DUCT VENTILATION FAN



Model	Voltage	Watts	m ³ /h	rpm	Noise	Pa	Speed	Remark
AM-DPT10P	110-250V-50/60Hz	12/20	168/210	2000/2500	53/55	150/170	2-Speed	BLDC Motor
AM-DPT15P	110-250V-50/60Hz	25/36	380/450	2000/2300	59/61	230/260	2-Speed	BLDC Motor
AM-DPT20P	110-250V-50/60Hz	45/75	680/780	1950/2250	66/69	300/350	2-Speed	BLDC Motor
DPT10-23-30(P1)	220-240V-50Hz	30/37	168/210	2000/2350	53/55	120/150	2-Speed	/
DPT15-44-30(P1)	220-240V-50Hz	53/56	408/450	2000/2350	59/61	210/250	2-Speed	/
DPT20-55-30(P1)	220-240V-50Hz	120/135	720/870	2150/2350	66/69	280/330	2-Speed	/


Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Dust size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
DPT10-23-30(P1)	258	99	216	178	80	60	665x315x505	1608	2456	3840	6	12.5	Ø100mm
DPT15-44-30(P1)	304	148	270	204	93	60	505x365x565	1056	2208	2700	4	10.5	Ø150mm
DPT20-55-30(P1)	300	198	270	215	113	85	585x365x615	840	1744	2032	4	16	Ø200mm
AM-DPT10P	305	100	230	200	58	76	665x350x505	1608	2456	3840	6	11.5	Ø100mm
AM-DPT15P	310	150	250	220	58	76	505x365x565	1056	2208	2700	4	8.5	Ø150mm
AM-DPT20P	302	200	275	240	60	109	585x365x615	840	1744	2032	4	12	Ø200mm

AC/DC

2 motor for option

2 speed (Low/High)

Dual-speed fan with high and low settings



HIGH AIRFLOW SILENT DUCT VENTILATION FAN



30A



30M

Model	Voltage	Watts	m ³ /h	rpm	Pa	Noise	Installation Dim.	Remark
AM-BPT30A	110-250V-50/60Hz	32/20	348/240	730	280	50/44	480x480	BLDC Motor
AM-BPT30M	110-250V-50/60Hz	32/20	348/240	730	280	50/44	600x600	BLDC Motor
BPT30-40-48(P6A)	220-240V-50Hz	80	402	750	241	47	480x480	/


Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duct size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
AM-BPT30A	600	25	585	474	200	48	650x250x660	243	540	648	1	6	Ø150mm
AM-BPT30M	600	25	585	474	200	48	650x300x660	220	456	540	1	6.1	Ø150mm
BPT30-40-48(P6A)	600	25	585	474	200	48	650x250x660	243	540	648	1	6.1	Ø150mm



AC/DC

2 motor for option

Integrated ceiling installation: AM-BPT30M
Common ceiling installation: AM-BPT30A/P6A



CEILING VENTILATION FAN



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
AM-APT20	110-250V-50/60Hz	8/5	390/300	1100	43/38	260x260	BLDC Motor
AM-APT25	110-250V-50/60Hz	10/5	570/420	1050	46/38	315x315	BLDC Motor
AM-APT30	110-250V-50/60Hz	16/10	840/600	950	46/38	375x375	BLDC Motor
APT20-4-30(B)	220-240V-50Hz	25	390	1100	42	260x260	/
APT25-5-30(B)	220-240V-50Hz	30	570	1000	43	315x315	/
APT30-6-30(B)	220-240V-50Hz	40	840	950	46	375x375	/


Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
AM-APT20	317	19	292	252	144	730x335x355	1680	3360	3920	5	7	200/8"
AM-APT25	365	19	356	309	144	750x390x395	1260	2600	2880	5	8.6	250/10"
AM-APT30	438	19	426	370	144	750x465x475	875	1800	2000	5	11	300/12"
APT20-4-30(B)	300	16	292	252	131	730x335x355	1680	3360	3920	5	8.5	200/8"
APT25-5-30(B)	365	17	356	309	131	750x390x395	1260	2600	2880	5	10.5	250/10"
APT30-6-30(B)	438	18	426	370	131	750x465x475	875	1800	2000	5	13.5	300/12"

AC/DC 38_{dB}

2 motor for option

Ultra-quiet

Vertical ceiling design





LOUVERED EXHAUST FAN (Metal Shell)

Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APB15-3-30(JIDC)	110-250V-50/60Hz	8	241	1350	39	200x200	BLDC Motor
APB20-4-30(JIDC)	110-250V-50/60Hz	10	486	1250	43	250x250	BLDC Motor
APB25-5-30(JIDC)	110-250V-50/60Hz	16	750	1250	45	300x300	BLDC Motor
APB30-6-30(JIDC)	110-250V-50/60Hz	24	1110	1000	46	350x350	BLDC Motor
APB15-3-30(JI)	220-240V-50Hz	26	241	1350	40	200x200	/
APB20-4-30(JI)	220-240V-50Hz	28	486	1250	42	250x250	/
APB25-5-30(JI)	220-240V-50Hz	36	750	1250	45	300x300	/
APB30-6-30(JI)	220-240V-50Hz	48	1200	1000	46	350x350	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APB15-3-30(JIDC)	234	Ø160	32	82	192	655x265x270	3640	7380	8100	5	6.1	150/6"
APB20-4-30(JIDC)	296	Ø200	38	67	242	600x325x333	2205	4655	5320	5	7.8	200/8"
APB25-5-30(JIDC)	338	Ø240	39	74	292	655x360x373	1620	3240	3780	5	9.5	250/10"
APB30-6-30(JIDC)	388	Ø290	39	85	343	680x420x430	1000	2125	2550	5	11.2	300/12"



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APB15-3-30(HJIDC)	110-250V-50/60Hz	8	241	1350	40	200x200	BLDC Motor
APB20-4-30(HJIDC)	110-250V-50/60Hz	10	486	1250	44	250x250	BLDC Motor
APB25-5-30(HJIDC)	110-250V-50/60Hz	16	750	1250	46	300x300	BLDC Motor
APB30-6-30(HJIDC)	110-250V-50/60Hz	24	1110	1000	48	350x350	BLDC Motor
APB15-3-30(HJI)	220-240V-50Hz	26	240	1350	41	200x200	/
APB20-4-30(HJI)	220-240V-50Hz	28	486	1250	43	250x250	/
APB25-5-30(HJI)	220-240V-50Hz	36	750	1250	46	300x300	/
APB30-6-30(HJI)	220-240V-50Hz	48	1200	1000	48	350x350	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APB15-3-30(HJIDC)	234	Ø160	52	82	192	655x265x270	3425	7285	8095	5	6.6	150/6"
APB20-4-30(HJIDC)	296	Ø200	57	67	242	600x325x333	2205	4410	5040	5	8.3	200/8"
APB25-5-30(HJIDC)	338	Ø240	60	74	292	665x360x380	1530	3150	3655	5	10.5	250/10"
APB30-6-30(HJIDC)	388	Ø290	60	85	343	690x420x430	1000	2000	2400	5	12.2	300/12"





Windproof and insect-proof



Metal Body

AC/DC

2 motor for option




LOUVERED EXHAUST FAN (Plastic Shell)



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APB15-3-30(SJDC)	110-250V-50/60Hz	8	241	1350	39	200x200	BLDC Motor
APB20-4-30(SJDC)	110-250V-50/60Hz	10	486	1250	43	250x250	BLDC Motor
APB25-5-30(SJDC)	110-250V-50/60Hz	16	750	1250	45	300x300	BLDC Motor
APB30-6-30(SJDC)	110-250V-50/60Hz	24	1110	1000	46	350x350	BLDC Motor
APB15-3-30(SJ)	220-240V-50Hz	26	241	1350	40	200x200	/
APB20-4-30(SJ)	220-240V-50Hz	28	486	1250	42	250x250	/
APB25-5-30(SJ)	220-240V-50Hz	36	750	1250	45	300x300	/
APB30-6-30(SJ)	220-240V-50Hz	48	1200	1000	46	350x350	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APB15-3-30(SJDC)	234	Ø160	32	78	195	645x260x270	3375	6885	7650	5	5.4	150/6"
APB20-4-30(SJDC)	296	Ø200	38	86	240	670x325x330	2665	4165	4760	5	6.3	200/8"
APB25-5-30(SJDC)	338	Ø240	39	86	280	700x365x375	1440	3060	3750	5	8	250/10"
APB30-6-30(SJDC)	388	Ø290	39	78	340	730x425x425	1000	2000	2400	5	9.7	300/12"



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APB15-3-30(HSJDC)	110-250V-50/60Hz	8	241	1350	40	200x200	BLDC Motor
APB20-4-30(HSJDC)	110-250V-50/60Hz	10	486	1250	44	250x250	BLDC Motor
APB25-5-30(HSJDC)	110-250V-50/60Hz	16	750	1250	46	300x300	BLDC Motor
APB30-6-30(HSJDC)	110-250V-50/60Hz	24	1110	1000	48	350x350	BLDC Motor
APB15-3-30(HSJ)	220-240V-50Hz	26	240	1350	41	200x200	/
APB20-4-30(HSJ)	220-240V-50Hz	28	486	1250	43	250x250	/
APB25-5-30(HSJ)	220-240V-50Hz	36	750	1250	46	300x300	/
APB30-6-30(HSJ)	220-240V-50Hz	48	1200	1000	51	350x350	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APB15-3-30(HSJDC)	234	Ø160	52	78	195	680x265x270	3425	7285	8095	5	5.6	150/6"
APB20-4-30(HSJDC)	296	Ø200	57	86	240	700x325x330	2605	4165	4760	5	6.8	200/8"
APB25-5-30(HSJDC)	338	Ø240	60	86	280	700x365x375	1440	3060	3570	5	8.7	250/10"
APB30-6-30(HSJDC)	388	Ø290	60	89	340	730x425x425	1000	2000	2400	5	11.2	300/12"





Windproof and insect-proof



Plastic Body

AC/DC

2 motor for option



BATHROOM EXHAUST FAN WITH LIGHT AND HEATER



2756

HEATING WATTS

24

LIGHTING WATTS

33

VENTILATION WATTS

DUAL MOTOR

Plastic-sealed ball bearing motor; Heater and ventilation operate simultaneously.



OSCILLATING AIR VENT

Adjustable oscillation (70°-110°) ensures even warmth throughout the room.




LED LIGHT

Integrated high brightness LED light.




110MM

110mm height
Ultra-thin body.

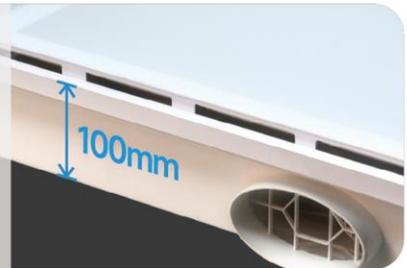

Model	Voltage	Rating Watts	Heating Watts	Lighting Watts	rpm	Noise	Installation Dim.	Qty.	G.W. (kg)	Remark
FN60-27M20-U5Y	220-240V~50Hz	2780	2756	24	1250	52	300x600	1	4.5	Remote

Model	Dimensions (mm)								Package (mm)	Loading Qty.			Duct size
	A	B	C	D	E	F	G	H		20'GP	40'GP	40'HQ	
FN60-27M20-U5Y	600	300	40	578	297	100	555	265	730x215x380	480	960	1120	Ø100 mm

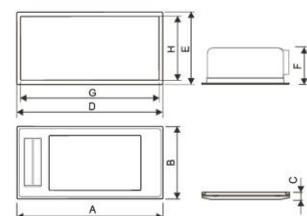




BATHROOM EXHAUST FAN WITH LIGHT AND HEATER

Model	Voltage	Rating watts	Heating watts	Lighting watts	rpm	Noise	Installation Dim.	Remark
FN60-24M19-U4	220-240V-50Hz	2480	2460	20	1200	51	300x600	/
FN60-24M19-U4Y	220-240V-50Hz	2480	2456	24	1250	52	300x600	Remote

Model	Dimensions (mm)								Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duce size
	A	B	C	D	E	F	G	H		20'GP	40'GP	40'HQ			
FN60-24M19-U4 FN30-24M19-U4Y	600	300	40	578	297	100	555	265	730x215x380	480	960	1120	1	4.5	∅100mm

2460_w Heating / Fan / Ventilation / Lighting




INDOOR HEATER



Model	Voltage	Rating watts	Heating watts	Blowing watts	Ventilation watts	rpm	Noise	Installation Dim.	Remark
FN30-22M4-U4Y	220-240V-50Hz	2200	2136	32	32	950	46	270x270	/
FN30-22M4-U5Y	220-240V-50Hz	2200	2136	32	32	950	46	270x270	/

Model	Dimensions (mm)						Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Duce size
	A	B	C	D	E	F		20'GP	40'GP	40'HQ			
FN30-22M4-U4Y FN30-22M4-U5Y	300	6	313	270	163	324	685x485x440	720	1440	1728	4	14	∅100mm

2136_w Remote Control Heating / Fan / Ventilation / Digital Display / Oscillating Louver



INDOOR HEATER



Model	Voltage	Rating watts	Heating watts	Blowing watts	rpm	Noise	Installation Dim.	Remark
FN30-20M3-U1	220-240V-50Hz	2200	2200	/	950	46	270x270	/
FN30-20M3-U2	220-240V-50Hz	2200	2168	32	950	46	270x270	/
FN30-20M3-U2Y	220-240V-50Hz	2200	2168	32	950	46	270x270	Remote control

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)
	A	B	C	D	E		20'GP	40'GP	40'HQ		
FN30-20M3-U1 FN30-20M3-U2 FN30-20M3-U2Y	300	10	290	268	130	505x355x725	1188	2484	2898	6	16.2

130 mm


130mm Installation Height




Remote Control



2-in-1 Heating and Fan




LOUVERED VENTILATING FAN



Model	Voltage	Watts	m ³ /h	rpm	Noise	Installation Dim.	Remark
APK20-4-1	220-240V-50Hz	28	438	1350	40	∅ 215	/
APK25-5-1	220-240V-50Hz	34	636	1300	46	∅ 265	/
APK30-6-1	220-240V-50Hz	38	960	1300	52	∅ 315	/
APK35-7-1	220-240V-50Hz	54	1386	1300	58	∅ 380	/

Model	Dimensions (mm)					Package (mm)	Loading Qty.			Qty.	G.W. (kg)	Size (mm)
	A	B	C	D	E		20'GP	40'GP	40'HQ			
APK20-4-1	247	200	140	∅10	∅215	570x500x320	2472	5376	5754	6	11.8	200/8"
APK25-5-1	291	250	150	∅10	∅265	655x505x325	1624	3528	3840	6	13.8	250/10"
APK30-6-1	355	300	160	∅10	∅315	695x380x388	1152	2520	2768	4	12.5	300/12"
APK35-7-1	410	340	170	∅10	∅370	770x440x450	700	1660	1800	4	15	350/14"





— SINCE 1974 —



Company Introduction



<http://jinling-fan.en.alibaba.com>



<http://www.jinling-fan.com>



<http://www.airmission.com>

JIANGMEN JINLING FAN MANUFACTURING CO.,LTD

ADD : 112-8, Nanshan Road, Waihai, Jiangmen, Guangdong, China

TEL : 0086-0750-3786613 0086-0750-3786166

FAX : 0086-0750-3786220

E-MAIL : jinling@jinling-fan.com